


Spiral Series Finishing Mills

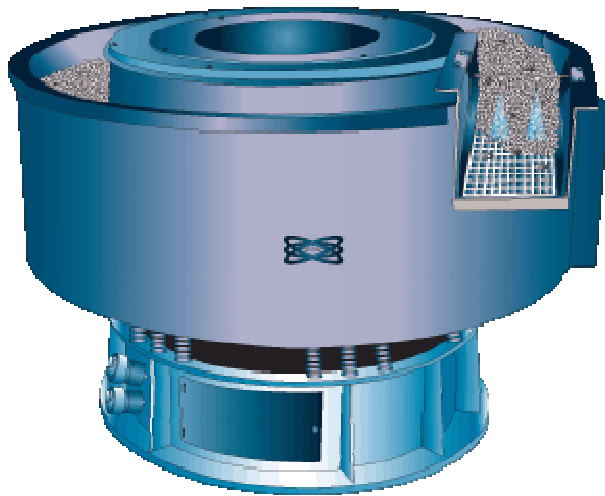

FMS-5LR

Capacity	5 ft ³ (1500 lbs. load capacity)
Maximum Straight Part Length	12 inches
Motion Generator	5 hp, TENV, 1200 RPM, 3-phase 230, 460 or 575 volt. 60 Hz.
Vibralite Bowl	Chamber - all cast polyurethane elastomer with 1" minimum thickness in high wear areas
Shipping Weight	Approximately 1300 lbs. (including control panel)

FMS-14LR

Capacity	14 ft ³ (4200 lbs. load capacity)
Maximum Straight Part Length	14 inches or more, depending on part cross-section and batch size
Motion Generator	10 hp, TENV, 1200 RPM, 3-phase 230, 460, or 575 volt. 60 Hz.
Lining	Abrasion-resistant lining of cast polyurethane with ¾" minimum thickness in high wear areas.
Shipping Weight	Approximately 3800 lbs. (including control panel)

FMS-20LR

Capacity	20 ft ³ (6000 lbs. load capacity)
Maximum Straight Part Length	18 inches or more, depending on part cross-section and batch size
Motion Generator	20 hp, TENV, 1200 RPM, 3-phase 230, 460, or 575 volt. 60 Hz. Recirculating oil lubrication system.
Lining	Abrasion-resistant lining of cast polyurethane with 1" minimum thickness in high wear areas.
Shipping Weight	Approximately 6500 lbs. (including control panel)

©2009 SWECO, a business unit of M-I L.L.C.