

382

Frozen Uncarbonated Beverage (FUB) Dispenser

Single Flavor

Features

Serve non-dairy frozen beverages, like frozen cocktails, frozen lemonade, fruit drinks, or other non-alcoholic drinks.

Requires separate remote refrigeration system for operation. The RC25 remote refrigeration system is recommended to be installed with the Model 382 for efficient operation. (See RC25 specification for further details.)

Freezing Cylinder

One, 10 quart (9.5 liter).

Mix Hopper

One, 12 quart (11.4 liter). An adjustable setting in the refrigeration system maintains mix temperatures in the hopper.

Indicator Lights

Add Mix light alerts the operator to add mix. When the Mix Out light flashes, the unit shuts down automatically to prevent damage.

Automatic Consistency Control

Refrigeration is regulated by monitoring viscosity. Adjustable control allows the operator to serve a wide variety of frozen beverages from regular slush to cocktails, pre-mix or neutral base, all at the desired thickness.

Continuous Auto Fill System

Mix supply to the hopper can be replenished automatically from a remote mix delivery system customized to suit your business by your local Taylor distributor. Mix delivery systems are available based on volume needs for Bag-in-Box, other post-mix or pre-mix products.

Flavor Cards

Four static cling flavor cards are provided: Frozen Drinks, Frozen Cocktails, Frozen Fruit Drinks and Margaritas.

Lighted Display (Optional)

Optional lighted display backlights the flavor card and illuminates the dispensing door area to draw attention to the product.




Rockton, Illinois 61072
800-255-0626
 Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
 e-mail: info@taylor-company.com

International Office
 Taylor Company S.r.l.
 Roma, Italy
 Tel: **+39-06-420-12002** Fax: +39-06-420-12034
 e-mail: romeoff@taylor-company.com

Packaging - Processing
Bid on Equipment
 1-847-683-7720
www.bid-on-equipment.com

382 Frozen Uncarbonated Beverage (FUB) Dispenser

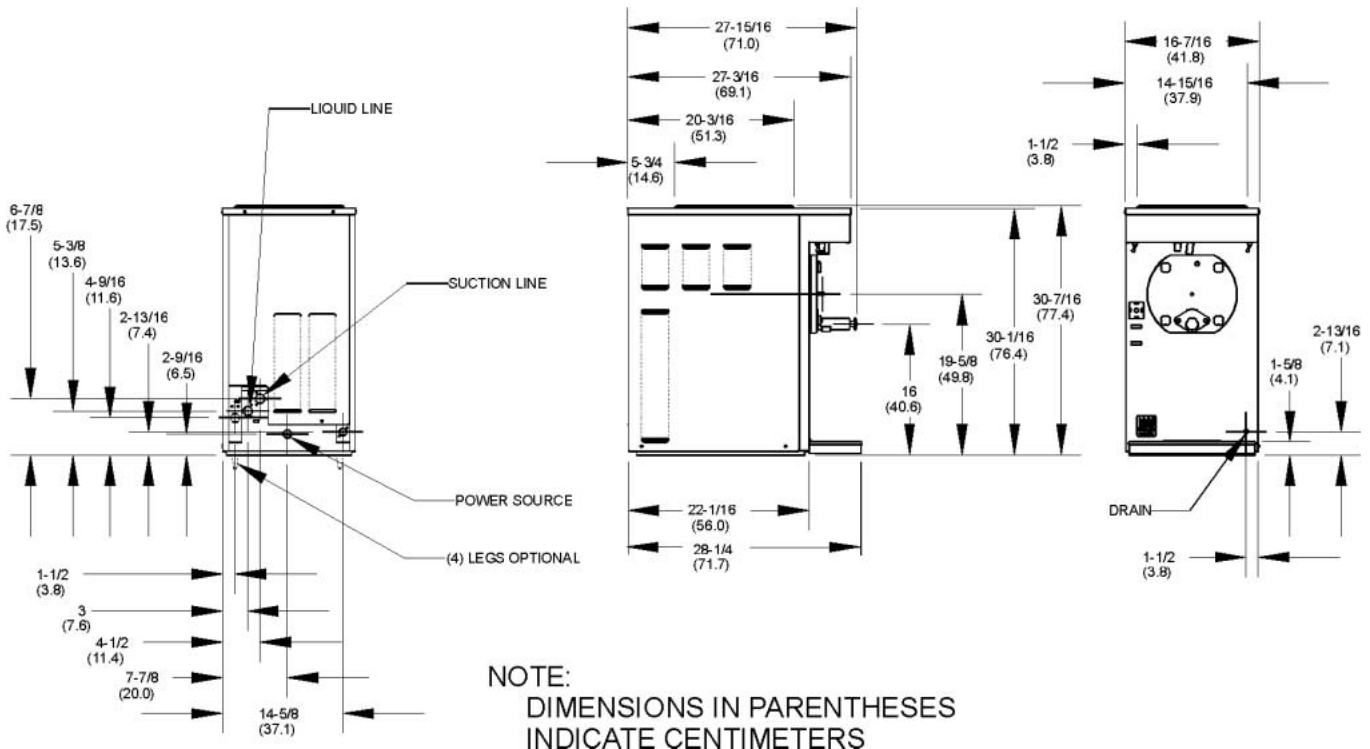

Weights	lbs.	kgs.
Net	160	72.6
Crated	185	83.9
	cu. ft.	cu. m.
Volume	14.5	0.40

Dimensions	in.	mm.
Width	16-7/16	418
Depth	28-1/4	717
Height	30-7/16	773
Counter Clearance	*	*

*Designed to rest on a plastic pad directly on counter top.

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
115/60/1	15	6	2P 3W
208-230/60/1	15	4	2P 3W
220-240/50/1	4	4	2P 3W

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability.
(For exact electrical information, always refer to the data label of the unit.)

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
Neutral: Yes No | Cooling: Air Water NA

Options: _____

Specifications

Electrical

One dedicated connection required. Manufactured to be permanently connected. See the Electrical chart for proper electrical specifications.

Beater Motor

One, 1/2 HP.

RC25 Refrigeration System (order separately)

One, 16,500 BTU/hr compressor. R404A. (BTUs may vary depending on compressor used.) See RC25 Specification for further details.

For maximum capacity, connect one dispenser to each RC25. Two dispensers may be connected to one refrigeration system; capacity may be reduced. The maximum total length of refrigeration suction line is 150 feet (45.7 m).

Clearance

No air clearance is required.

Options

- Customized Mix Delivery System
- Legs for counter clearance
- Lighted Display

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



Taylor Company,
A Division of Carrier Commercial Refrigeration, Inc.
Rockton, Illinois 61072
815-624-8333 800-255-0626 Fax 815-624-8000
www.taylor-company.com

Packaging - Processing
Bid on Equipment
1-847-683-7720
www.bid-on-equipment.com