

# C005

## Refrigerated Dairy Dispenser

### Features

Refrigerated, portion controlled dairy dispenser allows the operator to select the proper amount of three dairy products for various menu items and sizes.

### Refrigerated Storage

Three individual tanks store and conveniently dispense three different dairy products. Refrigerated to maintain temperature between 35 and 41°F (1.7 and 5°C). Center tank is 2.5 gallons (9.5 liters). The outer two tanks each hold 1.5 gallons (5.7 liter). Tanks may be refilled through the lid opening without removing from the cabinet. Each tank is marked at half gallon increments. When refilling, the operator selects the appropriate fill level on the control to match the fill level on the tank.

### Digital Temperature Indicator

Cabinet temperature is displayed to assure safe product temperatures.

### Controls

Operator selects appropriate dairy product, menu item desired, and serving size from durable Touch Sensor panel. Microprocessor control can easily be switched to serve neutral base Coffee Coolatta or coffee base Coolatta.

### Indicator Lights

Power light illuminates when cord is plugged in and power switch is turned on. Desired dairy product and menu item buttons illuminate when selected. When level in the tank is less than one quart (0.9 liter), the product light flashes. When the level in the tank reaches the mix out condition, the product light will remain on until tank is refilled and reset.

### Cleaning Lockout


The CLEAN light for each individual product flashes 68 hours after the last cleaning (four hours prior to lockout). This lockout feature has been incorporated to assure cleaning frequency. (Cleaning requirements are dictated by local health authorities.)

### Drip Tray

Drip tray is easily removable for cleaning.



# C005 Refrigerated Dairy Dispenser

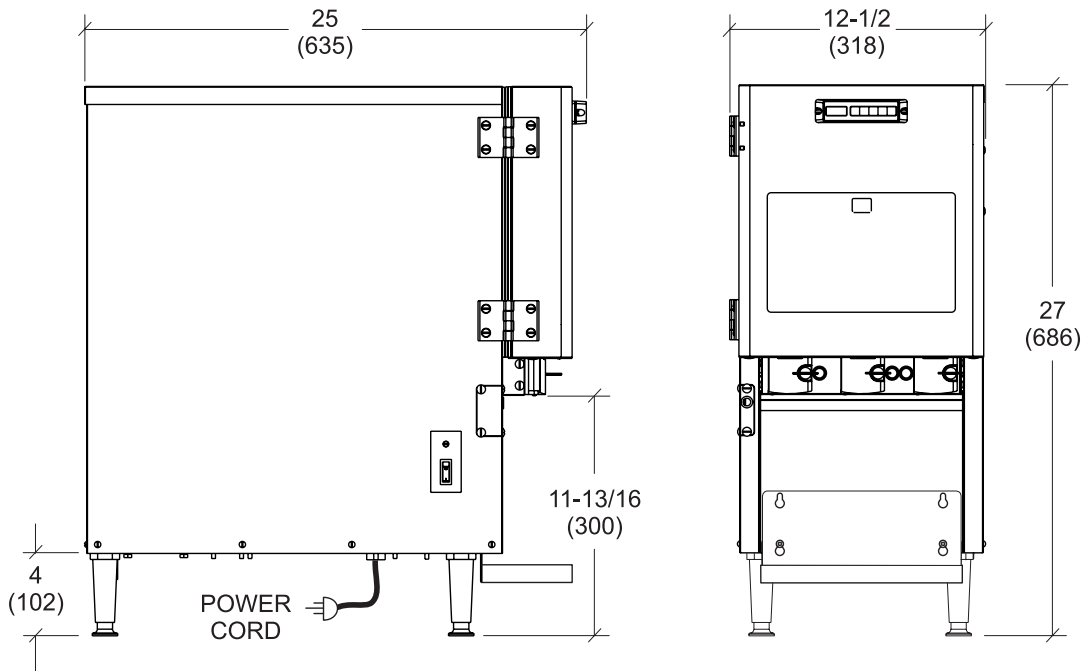

NOTE: FIGURES IN PARENTHESES INDICATE MILLIMETERS.

Weights	lbs.	kgs.
Net	95	43.1
Crated	101	45.8
	cu. ft.	cu. m.
Volume	7.0	0.2

Dimensions	in.	mm.
Width	12-1/2	318
Depth	25	635
Height	27	686
Counter Clearance	4	102

Mounted on standard legs.

Electrical	Total Amps	Supplied with NEMA Cord
115/60/1 Air	2.2	5-15P

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability.  
(For exact electrical information, always refer to the data label of the unit.)

## Bidding Specs

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
Neutral:  Yes  No Cooling:  Air  Water  NA

Options: \_\_\_\_\_

## Specifications

### Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be cord connected. Consult the international Taylor distributor for cord & receptacle specifications for 50 Hz. equipment.

### Refrigeration System

One, approximately 300 BTU/hr. R134a.  
(BTUs may vary depending on compressor used.)

### Air Cooled

Minimum clearance: 1" (25 mm) at the rear, and 4" (102 mm) underneath.  
Minimum air clearances must be met to assure adequate air flow for optimum performance.

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



**Taylor Company**  
A Division of Carrier Commercial Refrigeration, Inc.  
Rockton, Illinois 61072  
815-624-8333 800-255-0626 Fax 815-624-8000  
www.taylor-company.com

**Packaging - Processing**  
**Bid on Equipment**  
1-847-683-7720  
www.bid-on-equipment.com