


SHRINK PAK

weldotron®

5200 Series
SEMI-AUTOMATIC
CONSOLE SHRINK PACKAGING SYSTEMS

WITH RIGHT ANGLE PRODUCT FEED

FOR OUTSTANDING
PACKAGING
RESULTS WITH ALL
SHRINKABLE FILMS

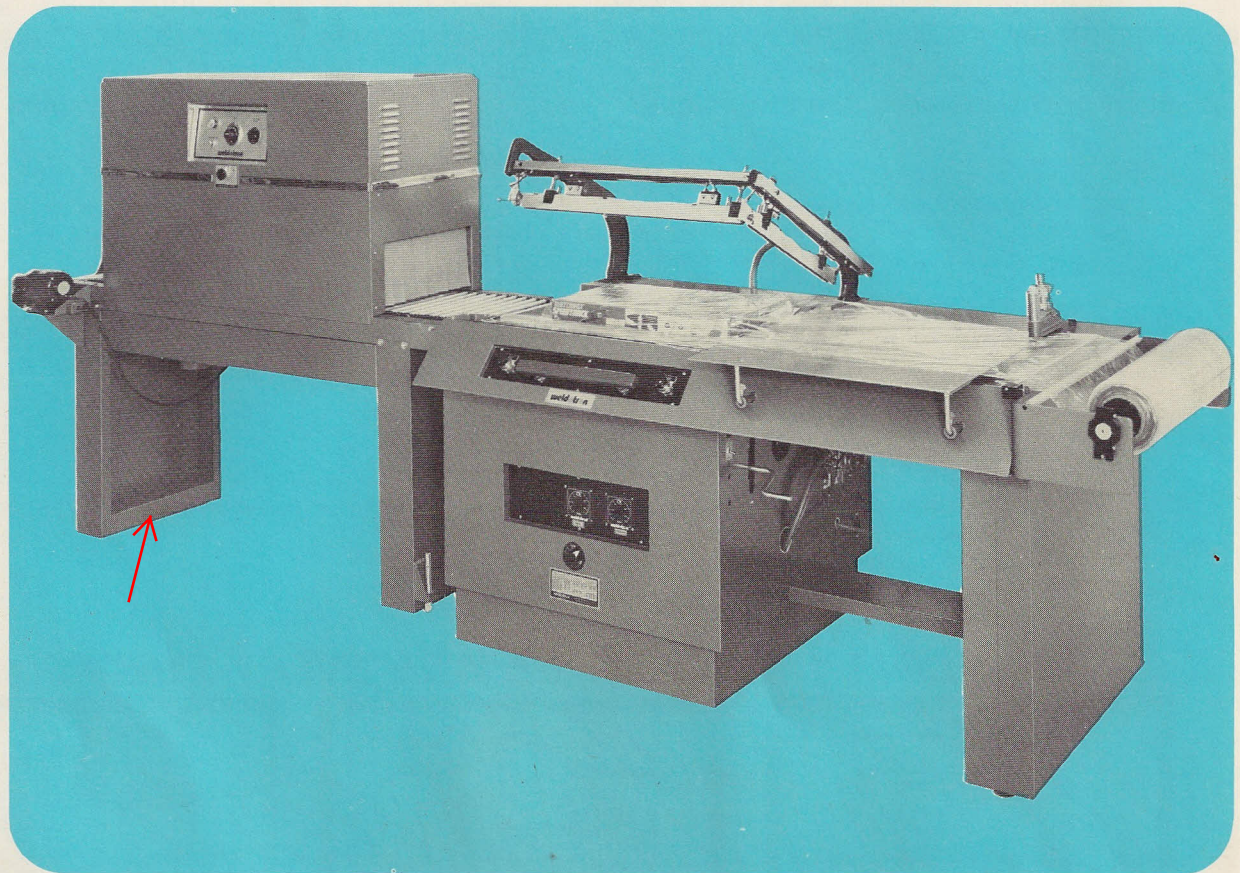

FEATURES:

- *Production rates up to 20 packages per minute*
- *Push button operation*
- *Automatic package discharge*
- *Patented radiant impulse sealing and adjustable self-compensating heat control system combine to insure uniform seal quality with all shrinkable films.*

Packaging - Processing

Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

5200 series wrappers combine air-powered sealing with automatic package discharge conveyor. Heavy duty sealing head construction and self-leveling seal bars assure consistent pressure and alignment, vital for optimum sealing performance. Quick conveyor height adjustment insures precise seal line positioning with products of varying depths. This combination of features makes it possible to produce up to 20 neat, trim-sealed packages a minute. With sealing head hold-down and powered product take away all automatically controlled, the operator is now free for production. Push button operation greatly reduces operator fatigue

and permits even untrained personnel to package at high rates. Brake controlled film unwind and a built-in high performance scrap removal system with 55 gallon drum allow the operator to maintain top efficiency throughout the day.

Highest quality components combined with rugged caster-mounted cast aluminum and steel console frame insure years of trouble-free service.

Other integral features of the 5200 series wrappers include: Duraloy™ element terminations, quick-adjust film core holders and a built-in operator safety system.

SPECIFICATIONS


5200 SERIES: Console type semi-automatic production L sealers with air-powered sealing head, powered discharge conveyor, automatic cycle timing; includes vacuum scrap removal system and hole punch.

Model	Seal Dimensions width x length	Volts	Power Amps	Phase	Shipping Dimensions	
					Size	Weight
5201	20" x 16"	230	25	1	72" x 48" x 52"	610
5202	20" x 28"	230	30	1	72" x 48" x 52"	680
5203	20" x 40"	230	35	1	82" x 46" x 50"	760
5242*	20" x 28"	230	42	1	72" x 48" x 52"	680


*Model 5242 is equipped with our Dynaband sealing system which creates wide, extra strong, hermetic seals.

- Air requirement for all models: 6CFM free air, 80PSI
- All models available for 50 - 60 HZ. operation


A COMPLETE PACKAGE WITH EVERY STROKE!

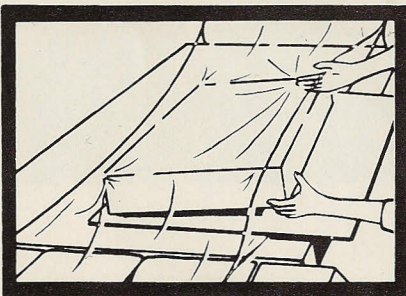

Operator inserts product between layers of film.

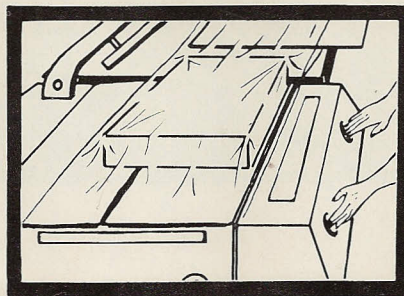

After product is transferred to sealing area, operator presses palm buttons to activate sealing head.

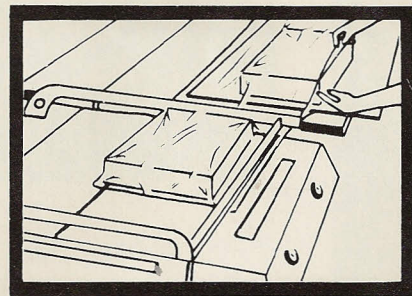

The package is automatically sealed and carried by the conveyor into the shrink tunnel while the operator inserts next product into the film.

1532 So. Washington Avenue (at I-287)
Piscataway, New Jersey 08854
Telephone: (201) 752-6700 (212) 227-6663
TWX 710-997-9502