


Model 1016

Manual Bandsaw

Rugged Powerful Accurate
In production since 1933

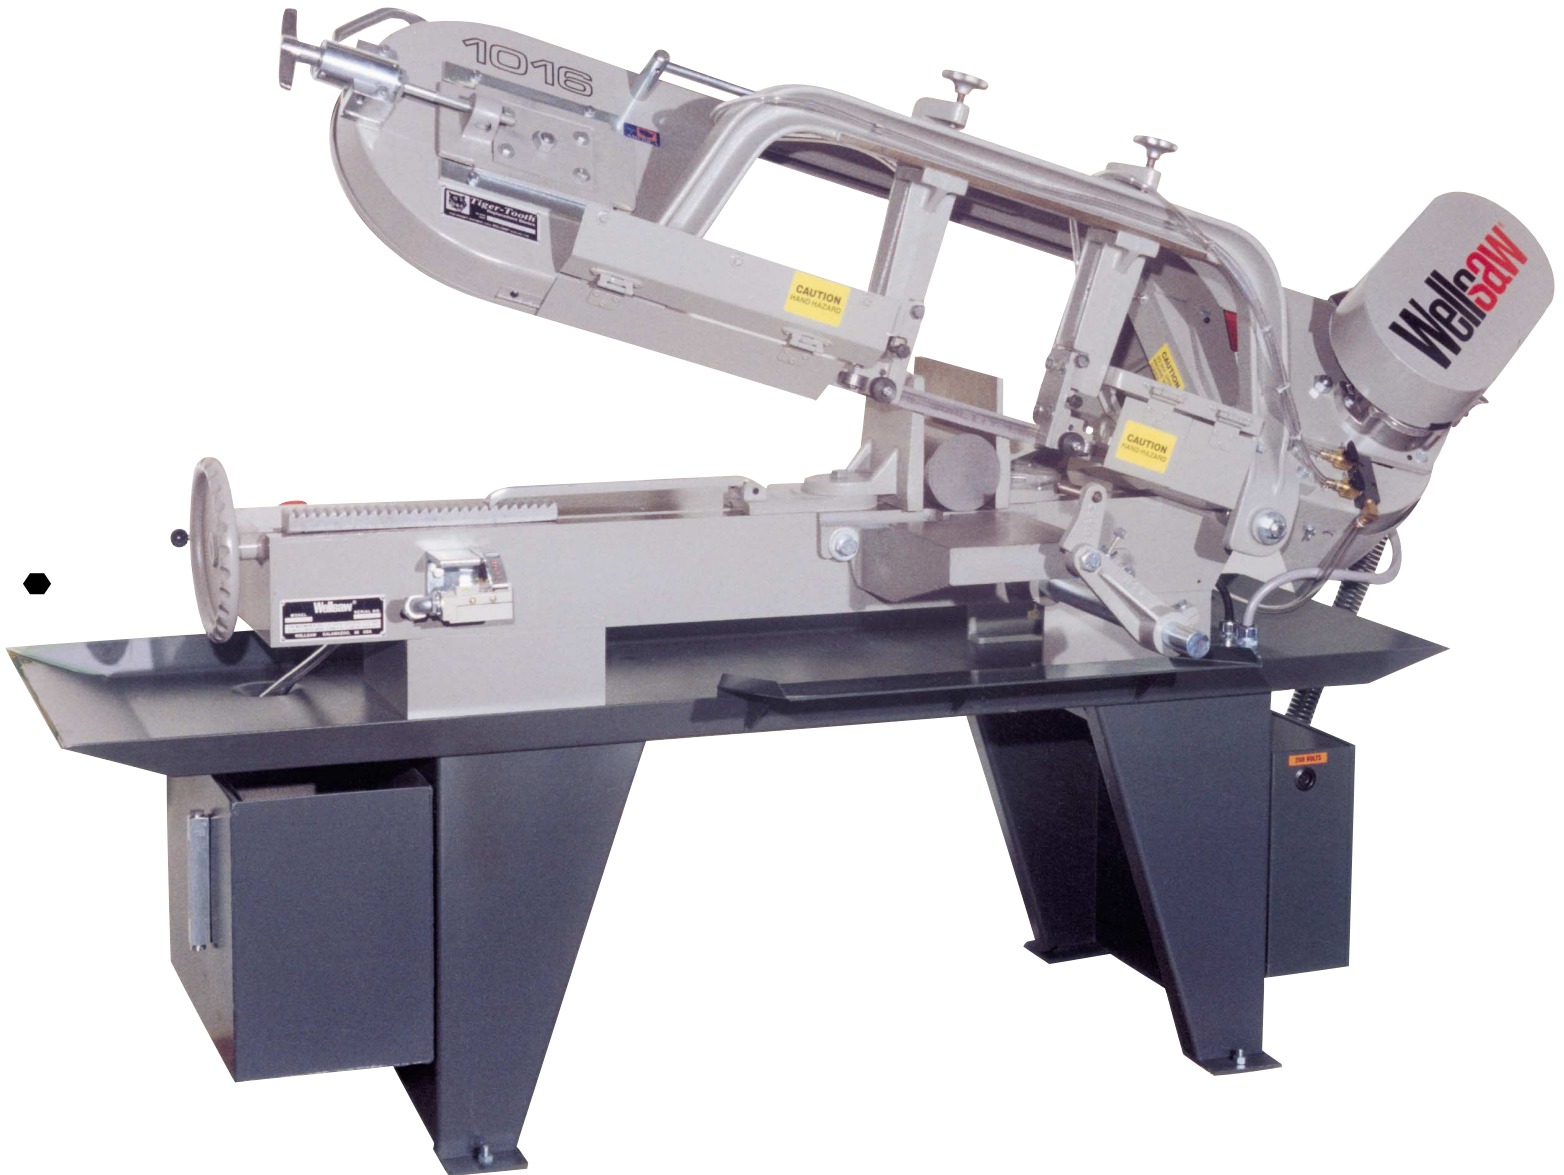

WELLSAWS work harder and last longer
because they are built better.

Wellsaw[®]

2829 N. Burdick St.
Kalamazoo MI 49004
Phone: 269-345-1132
Fax: 269-345-0095
www.wellsaw.com



Model 1016 Manual Bandsaw

Manufactured in the United States of America

Standard Features

Spring loaded Carbide Guides with Rollers
Combination Reduction Gearbox
and Perimeter Ring Gear Blade Drive
2 HP Baldor® Motor
Four Blade Speeds
Rite-Tension® Band Tensioning Device
Variable Hydraulic Downfeed Control
Flood Type Wet Cutting System
Rotary Blade Brush
110 Volts at Controls
Overload and Undervoltage Protection
Precision Ground Bed
Quick Acting Vise
Positive Frame Lock
Adjustable Stock Stop/Back-Gauge
Auto Shut-Off at End of Cut
OSHA Blade Guarding
Tiger-Tooth® Bi-Metal Blade
Coolant for Initial Start-Up

Specifications

Capacity	Round 10.5" Flat 16.5" Rectangular 10" x 16" 45° Angle 10" x 9"
Blade Size	1" x .035" x 11' 6" (138")
Blade Speeds	50-100-175-275 SFPM
Blade Guides	Carbide Guides with Rollers
Blade Tension	Manual Rite-Tension®
Electrical Options	115-208-230/60/1 or 208-230-460/60/3
Coolant System	Tank Capacity 8 gallons Submersible Pump 115V/ .6 Amp/170 GPH
Vise Control	Quick Acting / Manual Screw To 45°
Swivel Vise	Variable Hydraulic w/ Counterbalance Spring
Feed Control	15" Diameter Cast Iron
Band Wheels	29"
Bed Height	40"W x 84"L
Floor Area	900 lbs.
Shipping Weight	

Factory Installed Options Available

Variable Speed Blade Drive (70-375 SFPM)
Casters (Set of 4, 2 Locking)
NFFPA Electrics (w/disconnect)
Working Light w/ transformer
Stock Stand, 18"
5' Non-Powered Roller Conveyor
10' Non-Powered Conveyors

Consult Factory For Additional Options

Specifications subject to change without notice.

Wellsaw®

2829 N. Burdick St.
Kalamazoo, MI 49004
Phone: 269-345-1132
Fax 269-345-0095
Email: info@wellsaw.com