

# Zebra® R110Xi™ and R170Xi™

Multi-Protocol Printer/Encoders for EPC UHF Tags




## Unprecedented Flexibility in RFID Printer/Encoders

Built on the solid, tested *XIIIPlus™* printer platform, Zebra's R110Xi and R170Xi printer/encoders offer an unprecedented level of on-demand printing flexibility in tag placement and label size (4-inch and 6-inch), as well as unique features such as XML-Enabled printing for seamless integration into enterprise systems, easier programming, more detailed front panel information, faster throughput, and statistics tracking, which allows customers to track the number of good and unusable labels.

As Zebra's most robust printer/encoders, the R110Xi and R170Xi are built to withstand extreme conditions and deliver high-volume printing. They offer a rich set of features to meet the demands of leading RFID applications today—including auto-calibration, multiple power settings and flexible inlay placement. These printer/encoders embed the robust ThingMagic® Mercury4e® multi-protocol reader/encoder, which supports EPC Gen 2, ISO 1000-6C and existing standards. Using software-defined radio technology, the R110Xi and R170Xi models can be easily firmware upgraded to support emerging protocols and features with no compromise in performance.

The high-performance R110Xi (for 4-inch smart labels) and the R170Xi (for 6-inch smart labels) have been designed for case- and pallet-level identification for companies needing to streamline logistics and supply chain management and other applications including:

- Asset Tracking
- Inventory Management
- Work in Process
- Shipping/Receiving
- Distribution

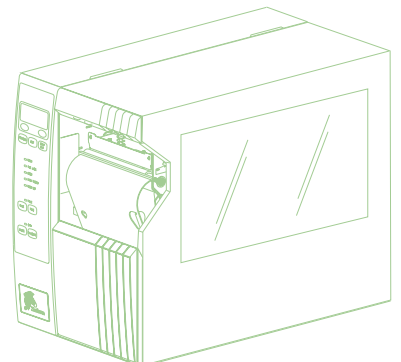

Packaging - Processing

**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)

# Zebra R110Xi/R170Xi

## Built on the Solid XiIIPlus Platform

With ZebraLink™ Solutions, you can take advantage of the latest innovations today and tomorrow. Zebra is continually adding new features and options to give you more ways to connect, more ways to control your printers, and more ways to manage your enterprise.

### Software

ZebraDesigner™ Pro  
ZebraDesigner™ for XML  
ZebraNet™ Bridge Enterprise  
ZebraNet™ Utilities v 7.0  
Zebra Universal Driver

### Networking

ZebraNet® Wireless Plus—Delivers 802.11b/g wireless security and new wireless capabilities.

ZebraNet® 10/100 Print Server—Available in an internal or external version that provides a complex wired solution for 10Base-T, 100Base-TX, and fast Ethernet 10/100 auto-switching networks.

### Firmware

ZPL II®—Universal language for Zebra printers. Simplifies label formatting and enables format compatibility with other Zebra printers.

Global Printing—Unicode™ compliant for fast multi-language, on demand thermal printing out of the box.

XML-Enabled printing—Direct-connect integration for bar code label printing that eliminates license fees and print server hardware, and lowers customization and programming costs.



**R110Xi**

The R110Xi for 4-inch-wide smart labels is designed for high performance and mission-critical ruggedness in the most demanding environments.

#### MAXIMUM PRINT WIDTH

203 dpi: 4.0" (103 mm)  
300 dpi: 4.0" (103 mm)

#### RESOLUTION

203 dpi/8 dots per mm  
300 dpi/12 dots per mm

#### PRINT SPEED

203 dpi: 2.4" (61 mm), 3" (76 mm) through 10" (254 mm) per second in 1" (25 mm) increments  
300 dpi: 2.4" (61 mm), 3" (76 mm) through 8" (203 mm) per second in 1" (25 mm) increments

#### PHYSICAL CHARACTERISTICS

Width: 10.37" (263.5 mm)  
Height: 15.5" (393.7 mm)  
Depth: 19.5" (495.3 mm)  
Weight: 50 lbs. (22.7 kg)

#### MEDIA CHARACTERISTICS

Label and liner width: 203 dpi and 300 dpi: .79" (20 mm) to 4.5" (114 mm)  
Ribbon width: 203 dpi and 300 dpi: .79" (20 mm) to 4.33" (110 mm)



**R170Xi**

The R170Xi for 6-inch-wide smart labels delivers the legendary 'round-the-clock' reliability and heavy-gauge-steel durability of Zebra's high-performance Xi™ series.

#### MAXIMUM PRINT WIDTH

203 dpi: 6.6" (168 mm)  
300 dpi: 6.6" (168 mm)

#### RESOLUTION

203 dpi/8 dots per mm  
300 dpi/12 dots per mm

#### PRINT SPEED

203 dpi: 2.4" (61 mm), 3" (76 mm) through 12" (305 mm) per second in 1" (25 mm) increments  
300 dpi: 2.4" (61 mm), 3" (76 mm) through 8" (203 mm) per second in 1" (25 mm) increments

#### PHYSICAL CHARACTERISTICS

Width: 13.15" (334.4 mm)  
Height: 15.5" (393.7 mm)  
Depth: 19.5" (495.3 mm)  
Weight: 67 lbs. (30.5 kg)

#### MEDIA CHARACTERISTICS

Label and liner width: 2.0" (51 mm) to 7.1" (180 mm)  
Ribbon width: 2.0" (51 mm) to 6.7" (170 mm)

Packaging - Processing

**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)

# Zebra R110Xi/R170Xi

## Specifications at a Glance\*

### STANDARD FEATURES

Fully integrated ThingMagic® UHF RFID reader/encoder for transponder types:  
EPC Class 1 Gen 2  
ISO18000-6B, ISO18000-6C

RFID processes optimized for fastest label throughput

RFID ZPL commands allow ease of RFID setup with maximum flexibility

Program position allows users to place transponders virtually anywhere within a smart label

RFID calibration feature automatically selects the program position for optimal transponder placement

RFID counters keep track of the good and unusable labels

Variable RFID power settings for both read and write allows maximum flexibility for printing small labels

Full-function front panel and multilingual back-lit LCD display with user-programmable password protection

Multi-level Element Energy Equalizer™ (E<sup>3</sup>) for superior print quality

Thermal transfer and thermal direct printing of bar codes, text, and graphics

32 bit 133 MHz RISC processor

Clear media side door—easy monitoring of supplies usage without opening the printer systems

Zebra printer driver for Windows® 3.X and 95/98/NT/2000/XP/2003 operating systems

Internal real-time clock

Advanced label/media counters

Auto calibration—printer calibrates when printer is turned on or when printhead is closed with approximately two labels

Early Warning Systems for low label, low ribbon, and clean printhead alerts

Unicode™ compliant

XML-Enabled—printing—direct-connect integration for bar code label printing; eliminates license fees and print server hardware and lowers customization and programming costs

### PRINTER SPECIFICATIONS

**Memory**  
PCMCIA or CompactFlash® (up to 256 MB memory each). (CF card not supported with ZebraNet Wireless Plus print server.)

**Print length**  
Maximum non-continuous: 39" (991 mm) with standard memory

**Media Sensors**  
Dual media sensors: transmissive and reflective

**MEDIA CHARACTERISTICS—SMART LABELS**

**Maximum label and liner length**  
39"/991 mm with standard memory

**Maximum roll outside diameter**  
8.0" (203 mm)

**Core diameter**  
3" (76 mm) core

**Media thickness**  
.003" (.076 mm) to .012" (.305 mm)

**Media types**  
Continuous, die-cut, black mark  
For optimum print quality and performance, use genuine Zebra™ supplies

**RIBBON CHARACTERISTICS**

**Outside diameter**  
3.2" (81.3 mm)

**Standard length**  
1476' (450 m) or 984' (300 m); provides 3:1 & 2:1 media roll to ribbon ratios

**Ratio**  
Ribbon is recommended to be at least as wide as media.

**Ribbon setup**  
Ribbon wound coated side out

**Core I.D.**  
1.0" (25.4 mm)

**OPERATING CHARACTERISTICS**

**Environmental**  
Operating temperature:  
Thermal transfer = 41° F/5° C to 104° F/40° C  
Thermal direct = 32° F/0° C to 104° F/40° C  
Storage temperature: -40° F/-40° C to 140° F/60° C  
Operating humidity: 20% to 85% non-condensing R.H.  
Storage humidity: 5% to 85% non-condensing R.H.

### Electrical

Universal power supply with power-factor correction 90-264 VAC, 48-62 Hz

### Agency approvals

Bi-National UL 60950 3rd edition/CSA CAN/CSA-C22.2 No. 60950-00 Third Edition; FCC Part 15.107 & 15.109 Class B; FCC Part 15.247; Canadian ICES-003, Class B; IC RSS-210

Zebra also has country-specific versions available. Contact your local representative for more information.

### Printer name

R110Xi; R170Xi

### Printer model

110Xi/III; 170Xi/III

### RELATED PRODUCTS

#### Options and Accessories

Additional fonts

Applicator interface

Media supply spindle

Media rewind spindle

PCMCIA or CompactFlash (CF) card (not supported with ZebraNet Wireless Plus)

### COMMUNICATIONS AND INTERFACE CAPABILITIES

High-speed serial interface

High-speed bi-directional, IEEE 1284-1994 parallel interface

USB 2.0 port

### FONTS/GRAPHICS/SYMBOLOLOGIES

#### Fonts and Character Sets

Standard fonts: 7 bitmapped, 1 smooth scalable (CG Triumvirate-Bold Condensed)  
Contains UFST® from Monotype Imaging, Inc.  
Sets: IBM® Code Page 850 International character set

#### Graphic Features

Supports user defined fonts and graphics—including custom logos

#### Bar Code Symbolologies

Linear Bar Codes: Code 11, Code 39, Code 93, Code 128 with subsets A/B/C and UCC Case C Codes, ISBT-128, UPC-A, UPC-E, EAN-8, EAN-13, UPC and EAN 2 or 5 digit extensions, Plessey, Postnet, Standard 2-of-5, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Codabar, and Planet Code  
2-Dimensional: Codablock, PDF417, Code 49, Data Matrix, MaxiCode, QR Code, MicroPDF417, TLC 39, GS1 DataBar (RSS), Aztec

Packaging - Processing

**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)



## R110Xi/R170Xi

Zebra's R110Xi and R170Xi printer/encoders combine Xi high-performance reliability with flexible RFID encoding for ultra-dependable smart labeling solutions.

Packaging - Processing  
**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)

### Meet Your Business Improvement and Compliance Labeling Needs with Zebra

Implement instant, measurable improvements in operating efficiency, accuracy, and supply chain visibility with Zebra's RFID smart label and wristband printing/encoding solutions.

Choose from one of the broadest RFID product portfolios in the world. Whether you need high-frequency (HF) or long-distance, ultrahigh-frequency (UHF) support, Zebra offers a range of high-performance, industrial/commercial and compact desktop printer/encoders to match your application and environment. Pair with high quality genuine Zebra™ smart labels for optimal printing performance.

### Cutting-Edge Features

- Automatic inlay position calibration—Only from Zebra! Saves users the time and frustration of manually calculating the inlay program position on new labels.
- Multiple RFID power settings—Users can adjust the RF power in response to various RFID protocols, transponder designs and sizes. This feature gives users unprecedented flexibility to accommodate tighter-pitch transponders.
- Flexible inlay placement—A Zebra exclusive since our very first printer/encoder, this feature lets users keep label formats intact while ensuring higher read rates.
- Models for 4- and 6-inch label widths—Gives users the flexibility to print and encode most popular label and transponder sizes. Zebra's is the first 6-inch printer/encoder.
- Easier programming—The Zebra Programming Language is now even better! We streamlined it to make it more intuitive and easier to use while ensuring continued support to legacy ZPL applications.
- Front panel display offers more detailed information on tag data, error status and self-test, ensuring that support personnel have the information they need to optimize production and get the maximum quality output from each roll of smart labels.
- Flash upgradeable—Assures maximum flexibility for upgradeability to future RFID protocols and evolving features.
- Faster throughput—Eliminated backfeed for RFID batches and faster VOID printing means better overall smart label printing performance.

\*Specifications subject to change without notice.

©2008 ZIH Corp. ZebraLink, ZebraNet, ZebraDesigner, Element Energy Equalizer, E<sup>3</sup> and all product names and numbers are Zebra trademarks and Zebra, the Zebra head graphic, ZPL II and ZebraNet are registered trademarks of ZIH Corp. All rights reserved. ThingMagic and Mercury4e are registered trademarks of ThingMagic, LLC. CompactFlash is a registered trademark of SanDisk Corporation. CG Triumvirate and UFST are trademarks of Monotype Imaging, Inc. and may be registered in certain jurisdictions. IBM is a trademark or registered trademark of International Business Machines Corporation in the United States, other countries, or both. All other trademarks are the property of their respective owners.



#### GLOBAL/AMERICAS HEADQUARTERS

Zebra Technologies Corporation  
333 Corporate Woods Parkway  
Vernon Hills, IL 60061-3109 U.S.A.

T: +1 847 793 2600 or  
+1 800 423 0442  
F: +1 847 913 8766

#### EMEA HEADQUARTERS

Zebra Technologies Europe Limited  
Zebra House, Unit 14, The Valley Centre  
Gordon Road, High Wycombe  
Buckinghamshire HP13 6EQ, UK

T: +44 (0) 1494 472872  
F: +44 (0) 1494 768251

#### ASIA-PACIFIC HEADQUARTERS

Zebra Technologies Asia Pacific, LLC  
120 Robinson Road  
#06-01 Parakou Building  
Singapore 068913

T: +65 6858 0722  
F: +65 6885 0838

[www.zebra.com](http://www.zebra.com)



An ISO 9001 registered company  
GSA#: GS-35F-0268N  
©2008 ZIH Corp. Printed in U.S.A.  
#13747L Rev. 9 (5/08) xM

OTHER LOCATIONS » USA California, Georgia, Rhode Island, Texas, Wisconsin EUROPE France, Germany, Italy, Netherlands, Poland, Spain, Sweden  
ASIA-PACIFIC Australia, China, Japan, South Korea LATIN AMERICA Florida (USA), Mexico AFRICA/MIDDLE EAST South Africa, India, Russia, United Arab Emirates