



TL35

Plate heat exchanger

Applications

General heating and cooling duties.

Standard design

The plate heat exchanger consists of a pack of corrugated metal plates with portholes for the passage of the two fluids between which heat transfer will take place.

The plate pack is assembled between a fix frame plate and a movable pressure plate and compressed by tightening bolts. The plates are fitted with a gasket, which seals the inter-plate channel and directs the fluids into alternate channels. The number of plates is determined by the flow rate, physical properties of the fluids, pressure drop and temperature program. The plate corrugations promote fluid turbulence and support the plates against differential pressure.

The frame plate and the pressure plate are suspended from an upper carrying bar and located by a lower guiding bar, both of which are fixed to a support column.

Connections are located in the frame plate or, if either or both fluids make more than a single pass within the unit, in the frame and pressure plates.

Typical capacities

Liquid flow rate

Up to 500kg/s (8000gpm), depending on media, permitted pressure drop and temperature program.

Plate types


TL35B plates

Frame types


FM, FG, FD and FS

Working principle

Channels are formed between the plates and the corner ports are arranged so that the two media flow through alternate channels. The heat is transferred through the plate between the channels, and complete counter-current flow is created for highest possible efficiency. The corrugation of the plates provides the passage between the plates, supports each plate against the adjacent one and enhances the turbulence, resulting in efficient heat transfer.

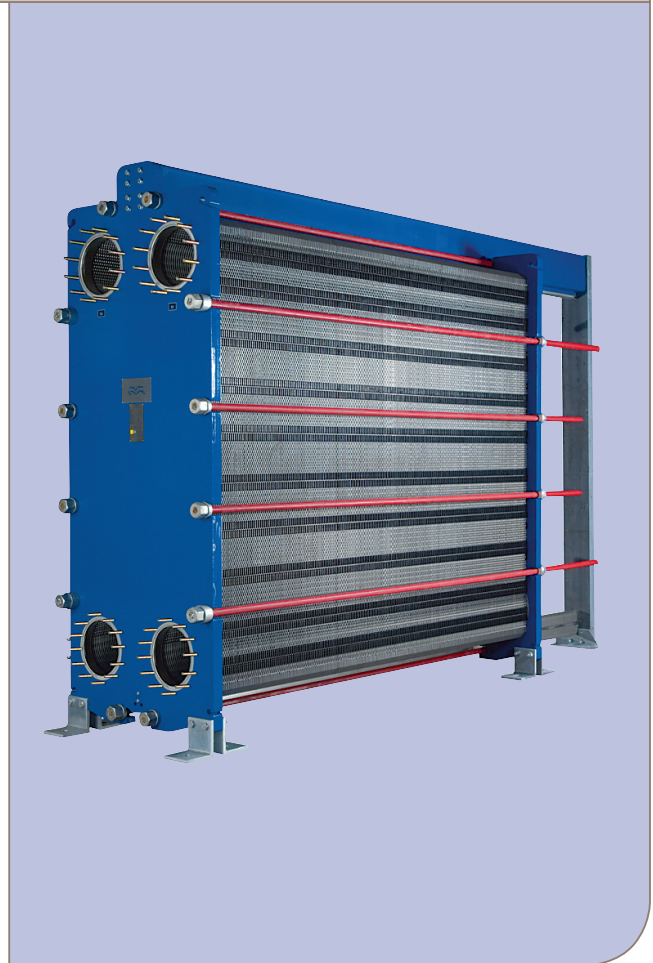

TL35-BFM

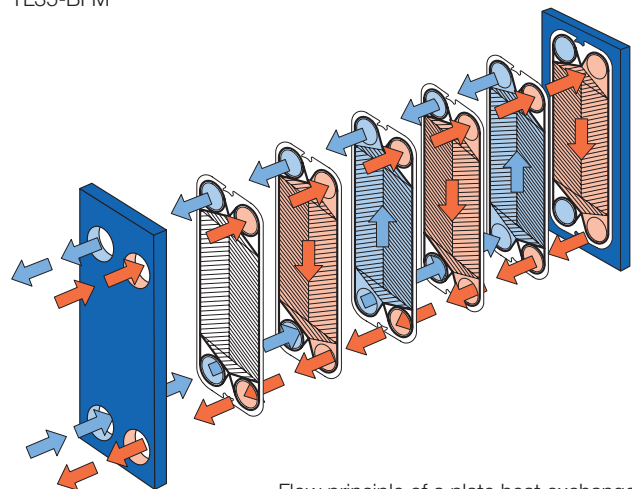

Flow principle of a plate heat exchanger

STANDARD MATERIALS

Frame plate

Mild steel, Epoxy painted

Nozzles

Carbon steel

Metal lined: Stainless steel, Titanium

Plates

Stainless steel Alloy 316 / Alloy 304 / Alloy 254 / Alloy C276 / Titanium

Gaskets

Nitrile, EPDM

TECHNICAL DATA

Pressure vessel codes, PED, ASME, pvcALS™

Mechanical design pressure (g) / temperature

FM	PED / pvcALS™	1.0 MPa / 180 C
FM	ASME	100 psig / 300 F
FG	PED / pvcALS™	1.6 MPa / 180 C
FG	ASME	150psig / 350 F
FD	PED / pvcALS™	2.5 MPa / 180 C
FD	ASME	300 psig / 350 F
FS	PED	3.0 MPa / 180 C
FS	ASME	400 psig / 350 F

CONNECTIONS

FM	pvcALS™	Size 300 or 350 mm DIN PN10
FM	PED	Size 300 or 350 mm DIN PN10
FM	ASME	Size 12 or 14" ASME Cl. 150
FG	pvcALS™	Size 300 or 350 mm DIN PN16
FG	PED	Size 300 or 350 mm DIN PN16, ASME Cl. 150
FG	ASME	Size 12 or 14" ASME Cl. 150
FD	PED / pvcALS™	Size 300 or 350 mm DIN PN25, ASME Cl. 300
FD	ASME	Size 12 or 14" ASME Cl. 300
FS	PED	Size 300 or 350 mm DIN PN40, ASME Cl. 400
FS	ASME	Size 12 or 14" ASME Cl. 400

Maximum heat transfer surface


1700 (18000 sq.ft)

PCT00061EN 0710

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com

Dimensions

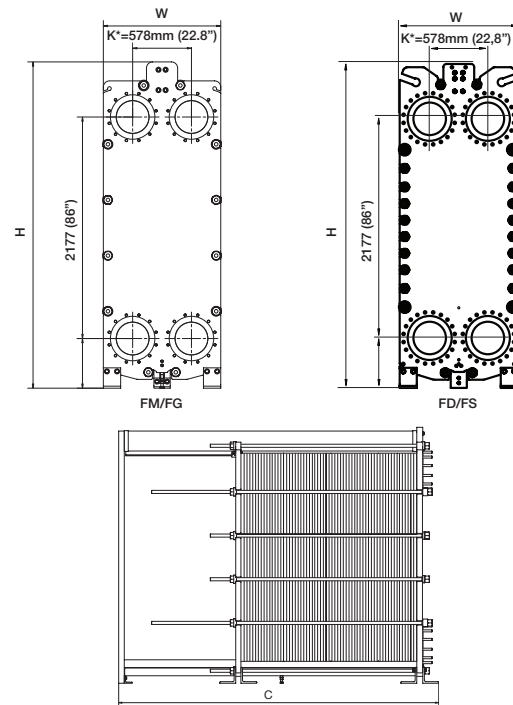

Measurements mm (inch)

Type	H	W	h	C _{min}	C _{max}
TL35-FM	3210 (126.5")	1154 (45.5")	488 (19.5")	2190 (86")	6360 (250")
TL35-FG	3210 (126.5")	1154 (45.5")	488 (19.5")	2205 (89")	6375 (251")
TL35-FD	3218 (127")	1174 (46.5")	496 (20")	2230 (88")	6400 (252")
TL35-FS	3218 (127")	1174 (46.5")	496 (20")	2245 (88")	6420 (253")

The number of tightening bolts may vary depending on pressure rating.
Max no. of plates TL35B = 1000

K* mm (inch)

584 (23.0")	FS	PED	Size 350DN PN40
589 (23,2)	PD	PED/pvcALS™/ASME	Size 14" ASME Cl.300
589 (23,2)	FS	PED/ASME	Size 14" ASME Cl 300 or 400

Particulars required for quotation

- Flow rates or heat load
- Temperature program
- Physical properties of liquids in question (if not water)
- Desired working pressure
- Maximum permitted pressure drop
- Available steam pressure

All rights reserved for changes in specifications without prior notification