

# 2-EZ<sup>®</sup>

## Case Erector / Bottom Taper


For optimal durability, reliability and value, the Combi 2-EZ is your clear choice for case erecting and bottom sealing. Built with the industry's strongest frame for the most demanding 3-shift environments, the 2-EZ readily integrates into your existing line. Featuring Combi's EZ-load walk-in case magazine, patented slideout 3M Accuglide II™ tapehead, and 2-minute "No Tool" changeover system, the 2-EZ is designed for minimal downtime and years of dependable service. The versatile Combi 2-EZ can form and seal the widest variety of cases, from single wall to triple wall corrugated. Add the Combi 2-EZ to your line for instant productivity.

### Features:

- Heavy-duty welded steel construction
- Walk-in case magazine
- Slideout tapehead
- Two minute changeover
- 12 cases per minute
- Two-week delivery

### Options:

- 2-EZ<sup>®</sup> Plus for larger cases
- NEMA 4 compliant washdown components
- Stainless steel framework and covers
- Speed-up kit (15 cases / minute, size dependent)
- High-capacity powered magazine
- 3" or 6" Accuglide II™ tapehead from 3M

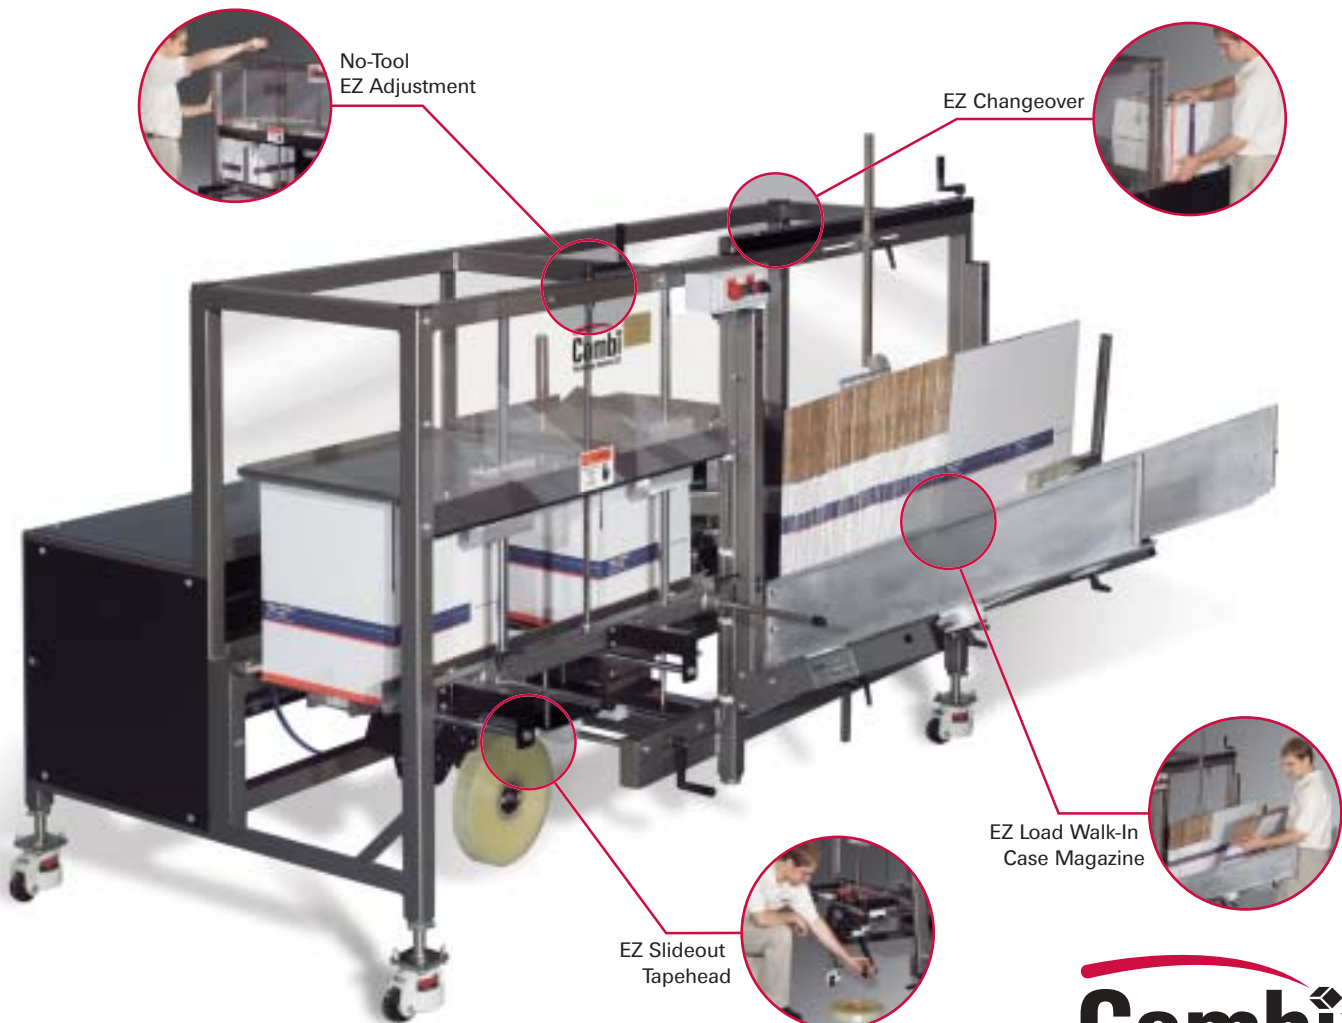

# 2-EZ

## Features and Specifications:

- EZ adjust changeover system (2 minutes)
- EZ load case magazine
- 3M Accuglide II™ tapehead
- Right or left hand execution
- Vacuum blowoff prevents corrugated dust build-up
- Allen Bradley PLC control
- Heavy-duty welded tubular construction
- Lifetime warranty on structural framework\*
- One-year comprehensive parts warranty\*
- Stainless steel contact parts
- Case discharge height from 18" to 32" (458mm to 813mm)
- Machine weight: 1400 lb (640kg)
- Rugged construction for 3-shift production environments
- Replacement parts ship within 24 hours

## Electrical Service:

110 volt / single phase / 20A

## Air Consumption:

80 PSI, consumes approx. 5.4 CFM@80 PSI



**The Combi 2-EZ** is capable of erecting and sealing the widest range of case sizes and styles.

## Case styles:

- RSC Regular Slotted Case
- CSSC With Meeting Minors
- RSC With 5th Panel Partition
- AFM All Flaps Meeting
- FOL Full Overlapping Flaps
- RSC With Reversed Glue Flaps

**Combi**<sup>™</sup>  
Packaging Systems LLC

5365 East Center Drive, N.E.  
Canton, Ohio 44721  
Phone: 1-800-521-9072  
Fax: 330-456-4644  
[www.combi.com](http://www.combi.com)

Model	Case Size Min. (LxWxH)	Case Size Max. (LxWxH)	Speed: Cases Per Minute	Overall System Footprint (approx)
2-EZ	6" x 4 <sup>1</sup> / <sub>2</sub> " x 4 <sup>1</sup> / <sub>2</sub> " 152 x 114 x 114mm	20" x 16" x 18" 508 x 406 x 458mm	12**	7' 10" x 5' 5" 2387 x 1651mm
2-EZ Plus	6" x 4 <sup>1</sup> / <sub>2</sub> " x 4 <sup>1</sup> / <sub>2</sub> " 152 x 114 x 114mm	24" x 16" x 18" 610 x 406 x 458mm	10	8' 10" x 5' 5" 2692 x 1651mm

\*See warranty for details.

\*\*15 cases / minute with optional speed-up kit (case size dependent)

