

Ergopack®

Pack Faster. Pack Smarter.


The innovative Combi Ergopack® has raised the standard for handpacking productivity. Efficient and durable, the Ergopack combines a case erector, a handpack station, and a sealer into a compact and cost-effective workcell. This ergonomically designed system features a hands-free indexing system that positions cases and product for optimal operator comfort, minimizing repetitive wrist and arm motions. Variable speed product infeed and on-demand case presentation combined with available 1-, 2- or 3-operator stations provide ultimate flexibility. This system, unique to the industry, features the built-in strength, ease of maintenance and customer support you can expect from all Combi equipment.

Features:

- Hands-free case indexing system
- Easy load case magazine
- Heavy duty welded tubular framework
- Quick no-tool changeovers
- 3M Accuglide II™ tapeheads

Options:

- Stainless steel framework
- Water washdown component packages
- Height adjustable product infeed conveyor
- Packstations for three or more operators
- Low tape / no tape alarm system
- Color touchscreen controls

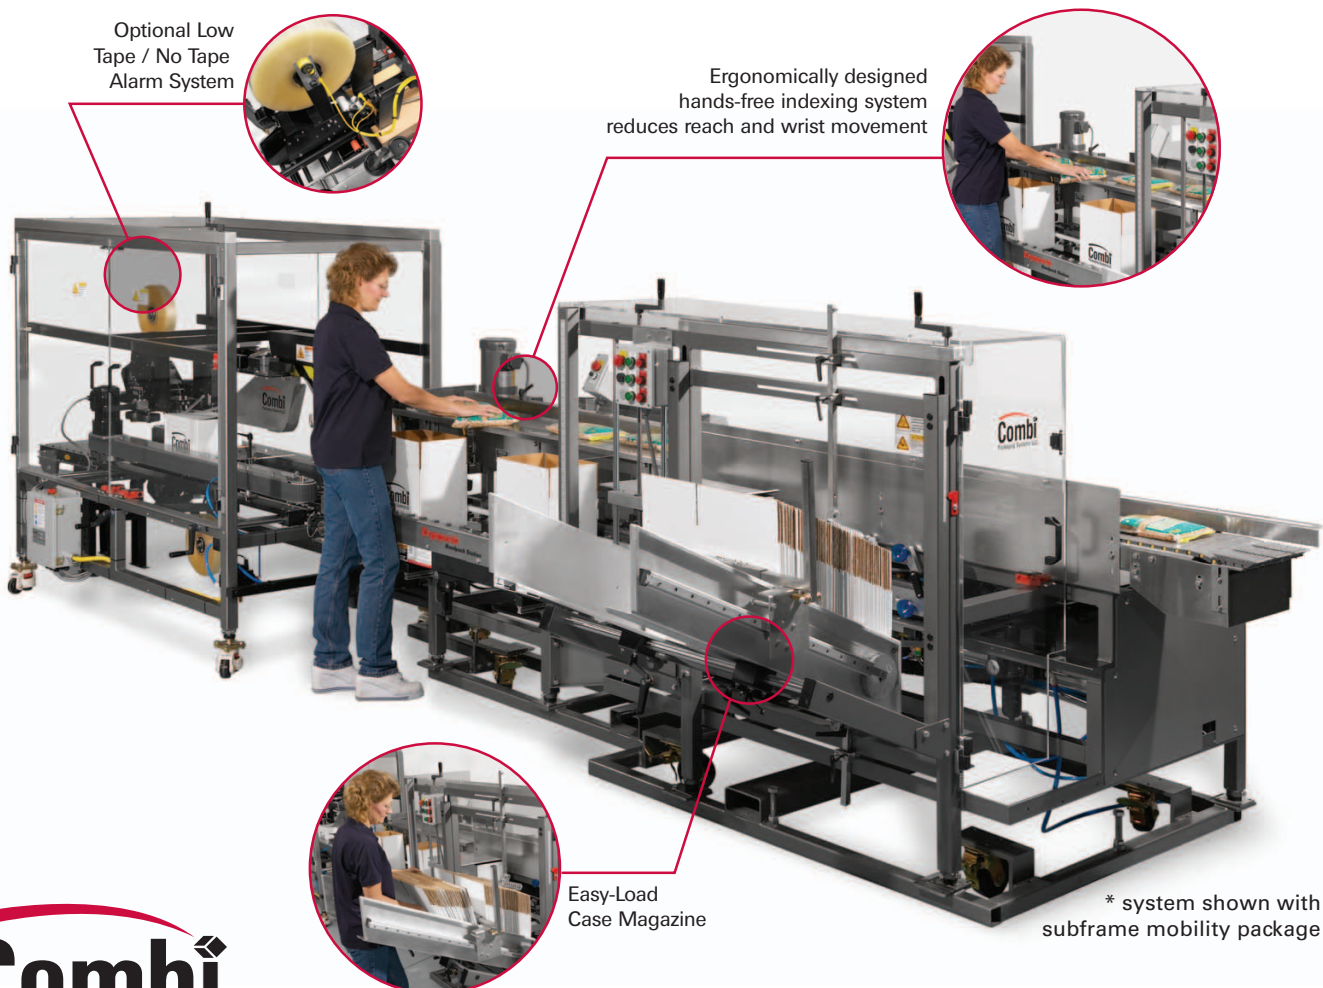

©

Additional Features:

- Heavy duty welded tubular steel construction
- Lifetime warranty on structural framework
- Right or left hand execution
- Vacuum blowoff prevents corrugated dust build-up
- Allen Bradley PLC control
- Stainless steel contact parts
- Labor-saving efficient design
- Lockout / tagout safety disconnect
- One-year warranty on non-wear parts*

Electrical Service:

230 volt / 3 phase / 10A (other options are available)

Air Consumption:

80 PSI, 5 CFM @12 cases per minute

Product Infeed Height:

Case discharge height + Height of tallest box
 + Top flap height


Standard Case Discharge Elevation:

21" to 28" (case dependent)

E

Model	Case Size Min. (LxWxH)	Case Size Max. (LxWxH)	Speed: Cases Per Minute	Overall System Footprint*
E-1000	4 ¹ / ₂ " x 4" x 5" 114 x 102 x 127mm	12" x 10" x 20" 305 x 254 x 508mm	20	6'6" x 15'5" 1981 x 4700mm
E-2000	8 ¹ / ₂ " x 4 ³ / ₄ " x 4" 216 x 121 x 102mm	16 ¹ / ₂ " x 12 ¹ / ₄ " x 19 ¹ / ₂ " 419 x 311 x 495mm	15	7' x 15' 11" 2134x 4850mm
E-2500	8 ¹ / ₂ " x 4 ³ / ₄ " x 4" 216 x 121 x 102mm	20" x 13 ¹ / ₂ " x 19 ¹ / ₂ " 508 x 343 x 495mm	12	7' x 16'11" 2134 x 5155mm
E-3000	13" x 7 ³ / ₄ " x 6" 330 x 197 x 152mm	24" x 16" x 24" 610 x 406 x 610mm	10	7'9" x 17'11" 2362 x 5460mm

Ergopack systems incorporate our standard E-Series Case Erectors. E-2500 System Shown Above.
 *Add 24" to length for double handpack station. Maximum case height is product dependent.

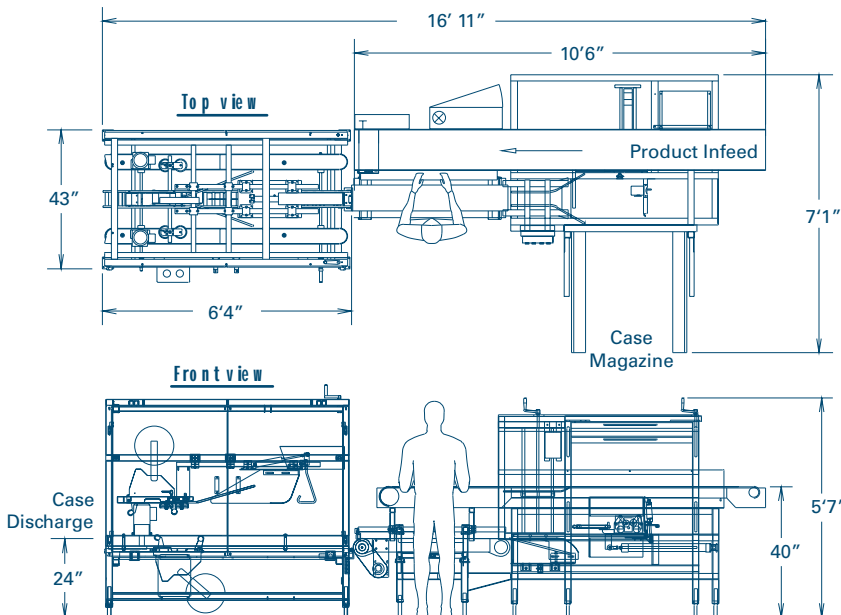

The CombiErgopack®

is unique in the industry and the perfect solution for handpacking the widest range of products. Ideal for food packing applications requiring inspection before packing; packing products of variable sizes where to tal automation is impractical; or applications where you need more than a stand-alone case erector but less than to tal automation.



5365 East Center Drive, N.E.
 Canton, Ohio 44721
 Phone: 1-800-521-9072
 Fax: 330-456-4644
 www.combi.com

