




PT MODEL Stainless Steel—2/3 Jacketed STEAM JACKETED KETTLE

The PT Model is the highly popular GROEN pedestal mounted, deep type, 2/3's steam jacketed stainless steel kettle. This 2/3's jacketed kettle is a versatile general purpose unit which provides large capacities in a minimum amount of space. Rim heights are kept as low as possible with consideration to the size and gallonage capacity of the kettle. This unit is widely used for preparation of soups, stews, sauces, pasta items and other kettle cookery foods. *Fresh frozen vegetables may be cooked to perfection with the addition of the TRI-BC three basket cooking system. (Bulletin AC4A) The attractive stainless steel pedestal base provides an open design for free and easy access for thorough cleaning and maintenance.

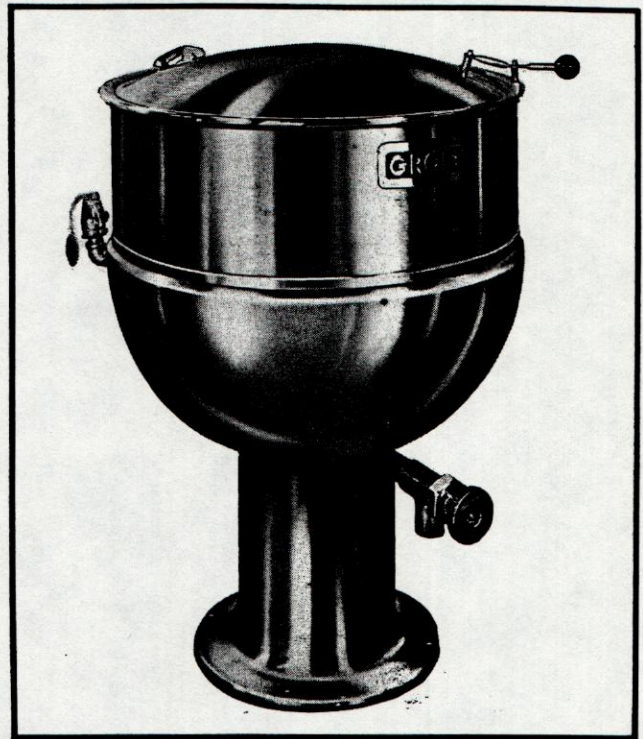

SPECIFICATIONS AND FEATURES

Kettle shall be GROEN Model PT _____ gallon stainless steel direct steam fired 2/3's jacketed kettle per Bulletin 1A and as follows:

- Kettle proper constructed of 18.8 type 304 stainless steel, solid one piece welded construction. Unit is provided with a heavy durable solid rolled rim with continuous seal weld on underside to assure maximum durability and sanitation.
- Interior of kettle polished to a 180 emery grit finish . . . Exterior finished to a bright semi-deluxe finish, insuring maximum ease in cleaning and maintaining brilliant appearance.
- ASME code constructed and National Board registered for operation up to a maximum working pressure of 25 P.S.I. Standard units are fitted with the GROEN Super Jacket which provides effectual steam space to top of hemisphere (jacketed section).
- Kettle shall operate dependably at any steam

pressure between 5 and 25 lbs. per square inch.

- Sanitary tangent drawoff and nickel alloy, dairy metal compression disc drain valve, easily disassembled without tools, to be provided.
- Cover furnished on 40 gallon and smaller units shall be a one-piece hinged dome cover. Slight extra cost for two-piece covers. A one-piece dome cover with model 51 counterbalanced actuator supplied with sizes of 60 gallons and larger.
- Unit design is strictly sanitary to comply with known health department and sanitation codes. NSF Approved and Listed.
- Kettle is mounted on an all stainless steel pedestal base, with the outer circumference of the pedestal flanged down vertically to insure proper sealing to the floor or deck.
- Options include, larger drawoffs, (2" & 3"), basket inserts, water fillers, and kettle brush kits. No. 51 cover available on 40 gallon unit. TRI-BC cooking basket system.
- Made in U.S.A.

GROEN's complete line of Food Service Equipment, including Steam Jacketed Kettles, Braising Pans and Steamers, utilize the most advanced designs and durable precision construction, assuring maximum efficiency and performance.

Packaging - Processing
Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

GROEN DIVISION DOVER CORPORATION

10 PRATT BOULEVARD, ELK GROVE VILLAGE, ILLINOIS 60007
TEL. (312) 439-2400

TELEX NO. 28-7413