


KALIX MODEL KX-10B

SUPER AUTOMATIC TUBE FILLING and SEALING MACHINE WITH BOTTOM FILL DEVICE

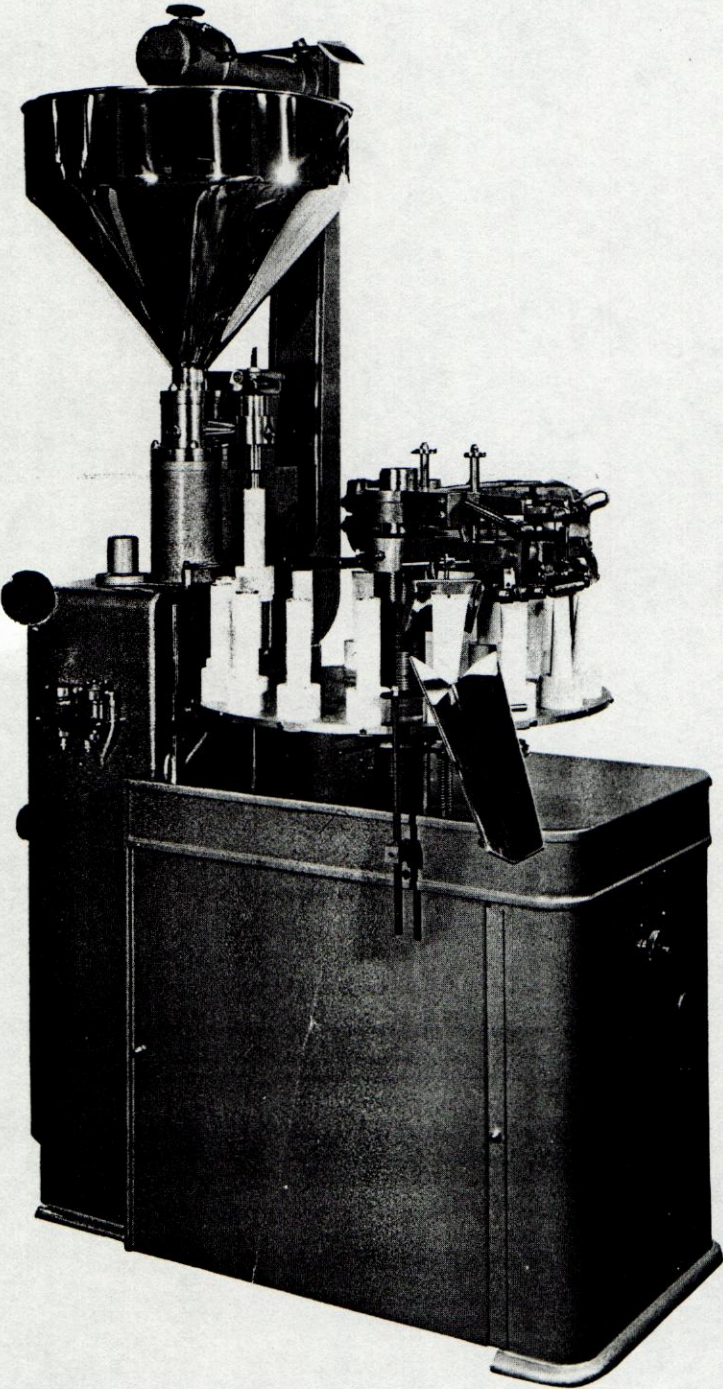

For METAL, PLASTIC and LAMINATE TUBES
Up to 2¼" Dia. by 12" Tall and For JARS, CANS,
CARTRIDGES, FLASKS and BOTTLES

Capacities: To 463 cc. up to 50 tubes per minute

ALL CONTACT PARTS STAINLESS STEEL and TEFLON

Available with Type A Closing Head to give 2 or 3 folds;
Type B to give 4 fold, saddle-back closure; Type D, radiant
heat and M-3 direct weld heads for plastic and laminate tubes.
Heads are interchangeable.

All contact parts are Stainless Steel and Teflon and machine
will handle any material from a liquid to a stiff paste.

Standard attachments included are:- Bottom-Fill Device; Hopper
and Agitator (heated hopper at extra cost); Piston Pump with
Teflon seals; Semi-rotary Valve—Teflon sleeved; Nozzle; Cap
Tightener; Counter; No-Tube-No-Fill Device; Suckback; Ejector;
Built-in gauge for tube settings; Metering Device in rear of
machine to adjust quantities even when in motion.

Motor is Standard 2 H.P. with thermal overload protection
(explosion proof and 1 phase available as extra).

The machine contains a minimum of moving parts and is easily
disassembled for cleaning and within the scope of an average
operator.

All machines are thoroughly tested before shipment and demon-
strations can be arranged.




Packaging - Processing

Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

**KALIX MODEL KX-10B TUBE FILLER
WITH BOTTOM FILL DEVICE**

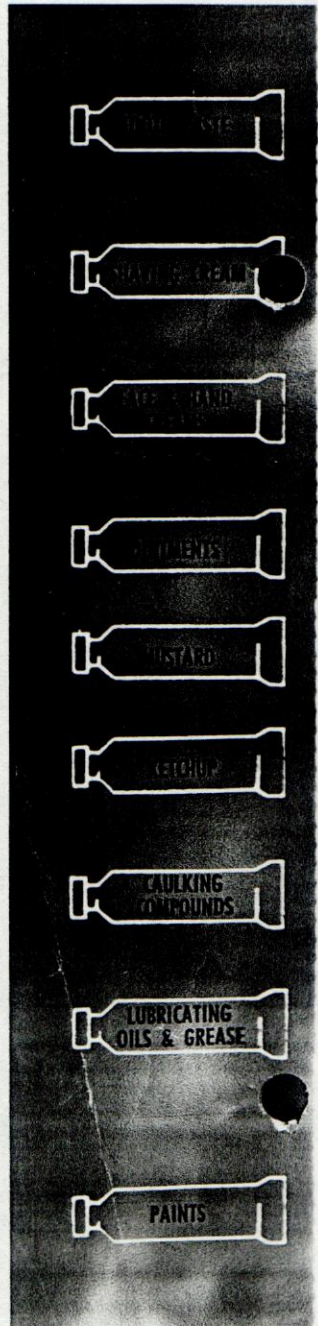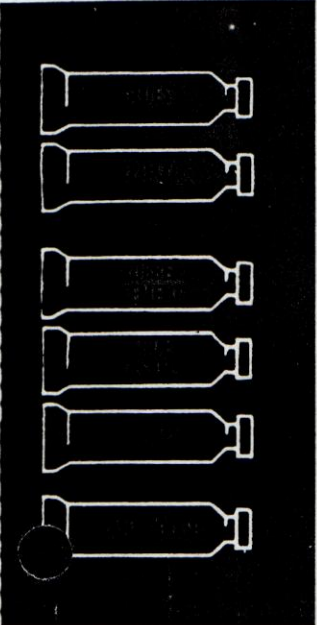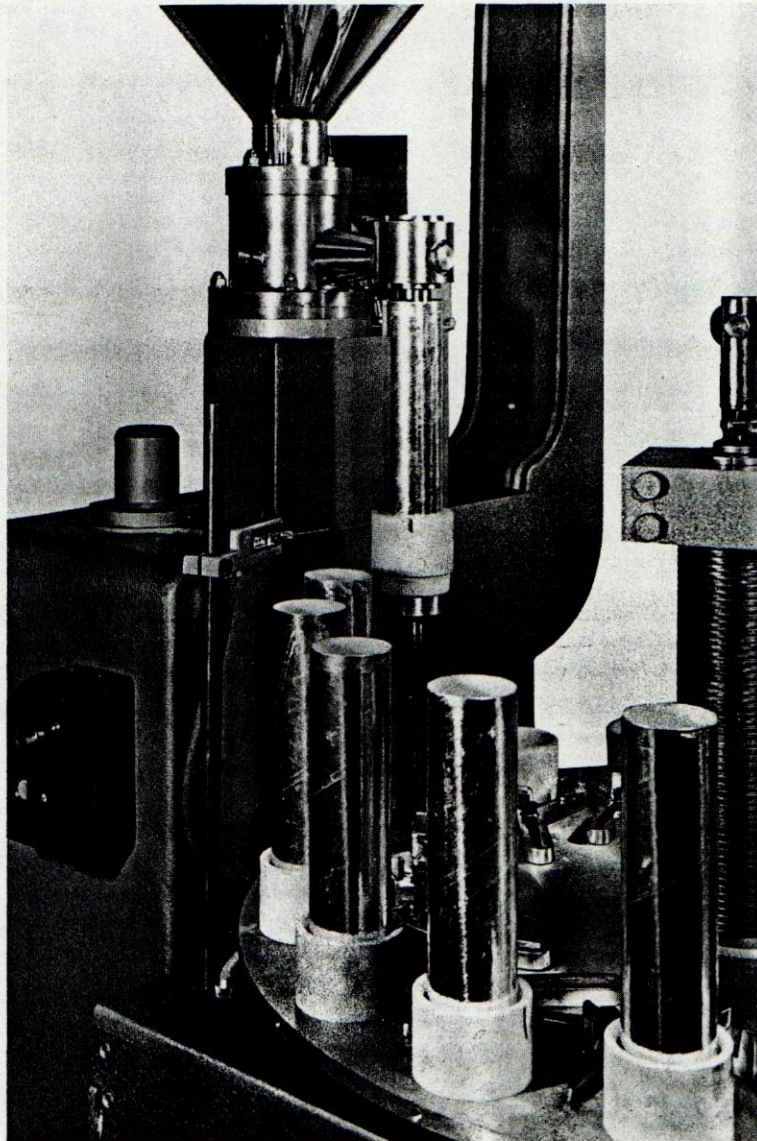

- Showing cup lifter with special air operated mandrin (nozzle) inserted to bottom of cartridge in process of filling caulking compound.
- Bottom Fill Device lifts container so that nozzle goes to extreme bottom and container descends as it is being filled.
- Nozzles:- 2 types available — Air Operated for 1 3/8" dia. containers and over; Mechanically Operated for tubes up to 1 1/4" dia. inclusive.

Packaging - Processing
Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com