


new

new

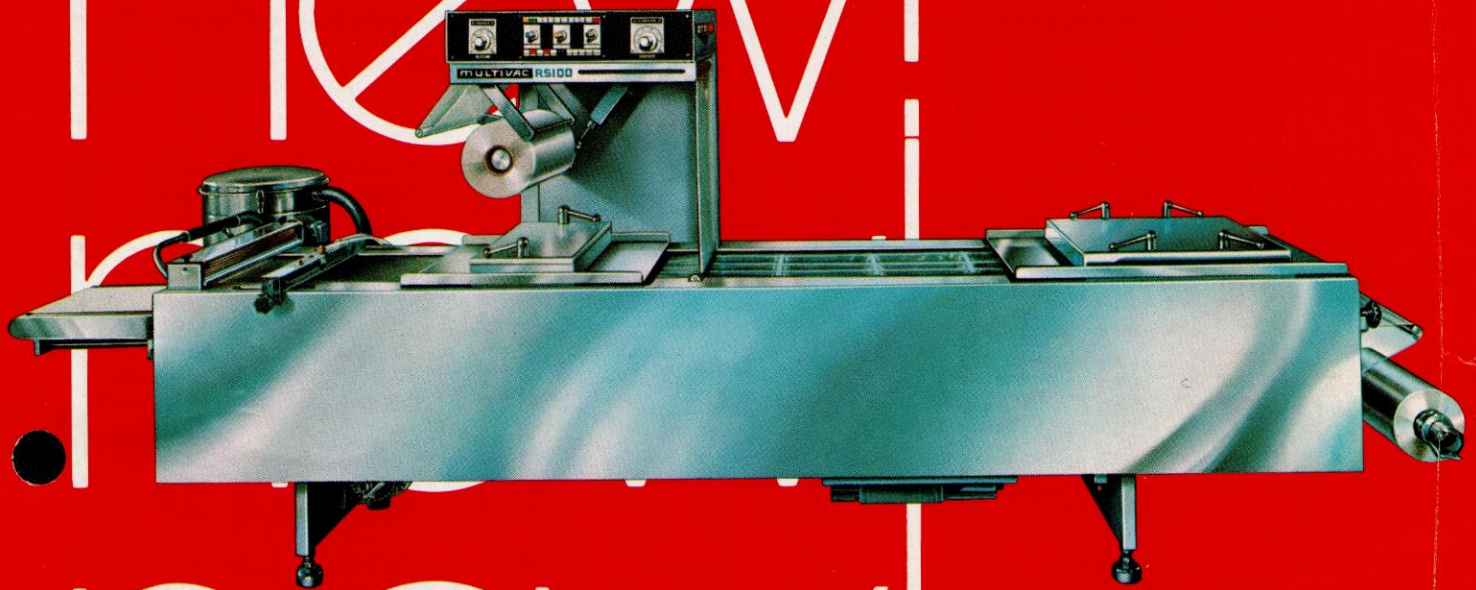

new!

economy model

KOCH


MULTIVAC®

R5100

Packaging - Processing
Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com

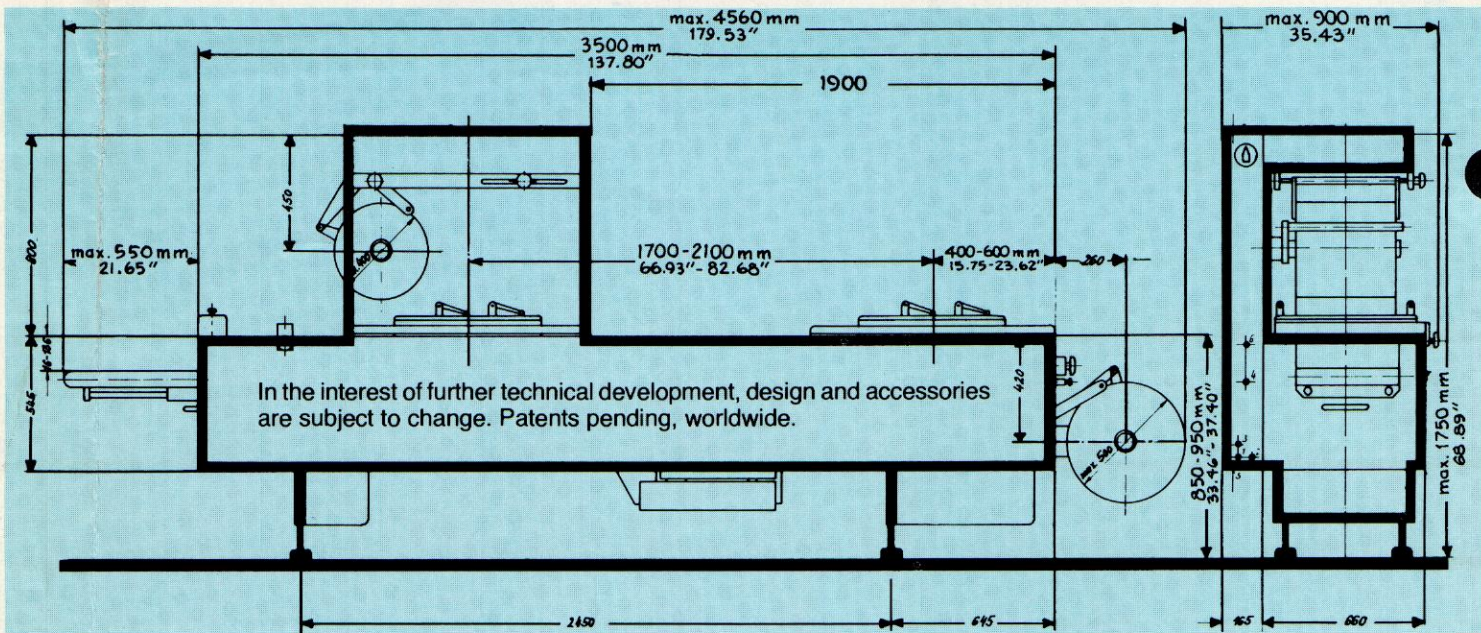

Packaging materials:

All thermoformable or pneumatically formable and heat sealable packaging materials.
 Width:
 Standard: 420 mm (16.54") lower web, 405 mm (15.94") upper web; Fixed machine width.
 Rollstock reel diameter:
 lower web—max. 500 mm (19.69") upper web—max. 400 mm (15.75")
 Reel core diameter:
 76 mm = 3" or 152 mm = 6"



Cut-off length:

120-600 mm (4.72"—23.62") single row up to max. 520 mm (20.47"), multi row up to max. 600 mm (23.62")



Package size:

max 520 mm x 405 mm (20.47" x 15.94")



Thermoforming depth

up to 130 mm (5.11")



Dies:

Each different size and kind of package requires an appropriate die. Dies can be changed in about 15 minutes. The forming and sealing stations can be



shifted in both directions from 1700 mm to 2100 mm (66.93" to 82.68")

Vacuum: Optional
 built-in vacuum pump.



Gas flushing:
 Standard



Capacity:

Up to 15 cycles per minute, depending upon the kind and size of product and the packaging material.



Electrics:

220-volt, 3-phase, 60-cycles, 50-amps.



Compressed air:

Depending upon accessories, between 2 and 15-cfm, max. 90-psi.



Cooling water:

Approx. 30 gallons per hour at max. 60-psi, depending upon water temperature and die size.



Weight:

Approx. 1800-lb. (standard model)



Construction and design:

Subject to the high standards of food processors, the R5100 is corrosion-resistant, reliable, safe, hygienic and easy to service.



Optional accessories:

- Discharge conveyor.
- Infeed conveyors, synchronized or variable speed.
- Photoelectric register mark control for register printed upper webs.
- Punching and cutting units for producing rounded corners on rigid film packages.
- Circular and shape cutting units for cutting round or other shaped packages.
- MULTIPRINT code dater for printing or heat embossing package information.
- MULTIVAC flexographic printer.
- Transverse labeller for self-adhesive labels.
- Synchronized portioning and filling units for, for example, peanuts, granular, pasty and liquid products, and medical and technical objects.
- Compressor for compressed air supply.

Come on in for a test drive.

Visit our new packaging center and demonstration room. Watch us make a sample package of your new product. It's easy to arrange. No obligation, of course. Call Koch Multivac for an appointment.

Six or seven Multivac machines are set up and ready

to run. Operate them yourself if you like. Bring your marketing group for a private tour. Service training school, regional service centers, computerized parts inventory . . . this is the kind of leadership that earned Koch the No. 1 position in the industry. We are ready for inspection.



1414 West 29 St., Kansas City, Mo. 64108 Phone (816) 753-0815

Packaging - Processing
Bid on Equipment

1-847-683-7720

www.bid-on-equipment.com