


# FILLING STATION

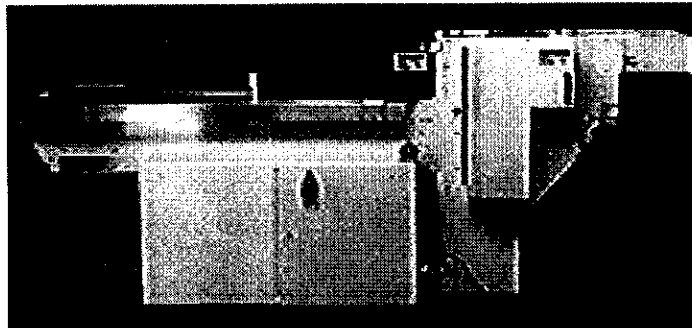

Automatic  
Filling Machine

OPTIMA CORPORATION  
1330 Contract Drive  
Green Bay, WI 54304  
U.S.A.

Tel. (414) 339 2222  
Telefax (414) 339 2233


**Packaging - Processing**  
**Bid on Equipment**

1-847-683-7720

[www.bid-on-equipment.com](http://www.bid-on-equipment.com)

**B. Technical data**

**1. Weight and dimensions**

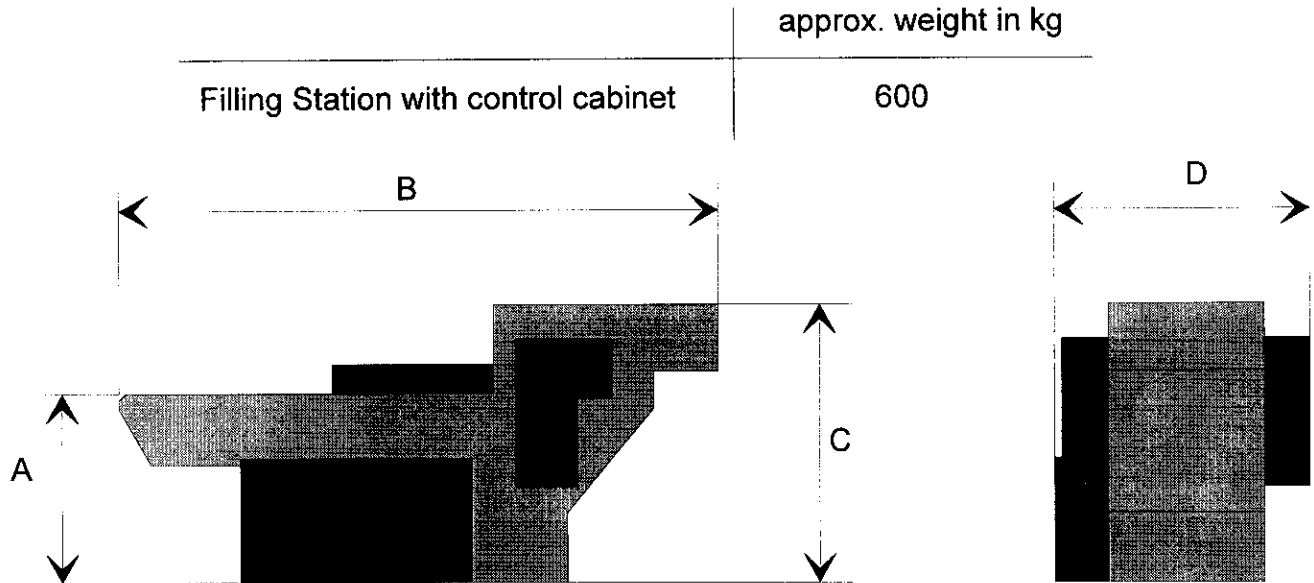

A*	B	C*	D
952	2690	1350	1143


\* Add 100 mm for machine on castors (all dimensions shown are mm)

**2. Output Filling Station**

Max. output up to 15 bags / minute double layer, 25 bags / minute single layer  
(depending on pack size, accessories and operator skills)

3. Format range

Dimensions of formation (mm)		Single Layer	Double Layer
Length	min / max	100 / 300	100 / 300
Width	min / max	60 / 320	60 / 320
Height	min / max	40 / 120	80 / 180



4. Electrical requirements

Voltage	220	V
Frequency	60 / 50	Hz
Power consumption approx.	2	kW



Please note: Check voltage and frequency before connecting!!!

5. Pneumatic requirements

Air pressure	min. 5.5	bar, oil free
Connection diameter	1/2	inch
Air consumption	approx. 38	NL/cycle*

(\* +/- 20% depending on product infeed, accessories and machine settings)

6. Required bag dimensions

