



800-523-3654

# BALER & COMPACTOR

[www.ptrco.com](http://www.ptrco.com)

## Self-Contained Compactors

Totally



Listed!



# PT-350

(35 Cubic Yards)

The PT-350 Compactor has been engineered and manufactured to provide many years of reliable service. The heavy-duty structural steel components are welded by AWS certified technicians and water tested to ensure leak proof containment under high compaction forces. This unit has total U.L. approval, standard 3 button controls, On/Off key switch, mushroom stop, auto reverse and a *Sure-Tite*™ door seal.

### Specifications

Charge Box Capacity	2 Cu Yd
Container Capacity	35 Cu Yd
Clear Top Opening (L x W)	41" x 60"

### Electrical Equipment

Electrical Motor 208/230/460v	3 Phase
Horse Power	10
Electrical Control Voltage	120 VAC

### Performance Characteristics

Cycle Time	31 sec
Total Normal Force	42,708 lbs
Total Maximum Force	51,250 lbs
Normal Ram Face Pressure	23.8 psi
Maximum Ram Face Pressure	28.5 psi

### Hydraulic Equipment

Hydraulic Pump Capacity	10.5 gpm
Normal Pressure	2000 psi
Maximum Pressure	2400 psi
Hydraulic Cylinder (2) Bore	4"
Hydraulic Cylinder Rod	2.5"



PTR Baler & Compactor Company • 2207 E Ontario St. • Philadelphia, PA 19134  
 215-533-5100 • (FAX) 215-533-8907 • 800-523-3654 • [www.PTRCO.com](http://www.PTRCO.com)




Printed in the U.S.A  
 ©PTR Baler & Compactor

TITLE: PT-350 SELFCONTAINED

. DWG. NO: AC402174


PTR BALER & COMPACTOR

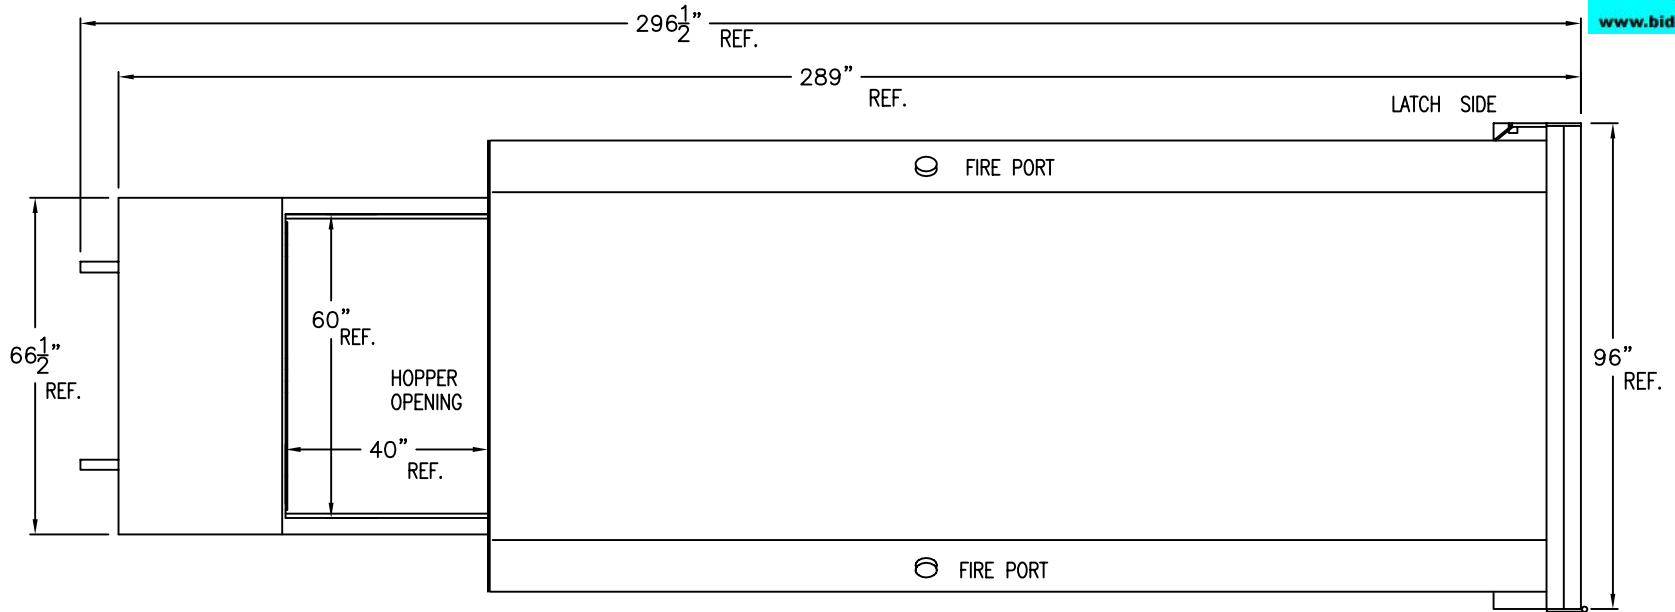

TOP VIEW

OVERALL REFERENCE DIMENSIONS TO SCALE  
REMAINING ILLUSTRATION IS NOT TO SCALE

ALL DIMENSIONS REFERENCE ONLY

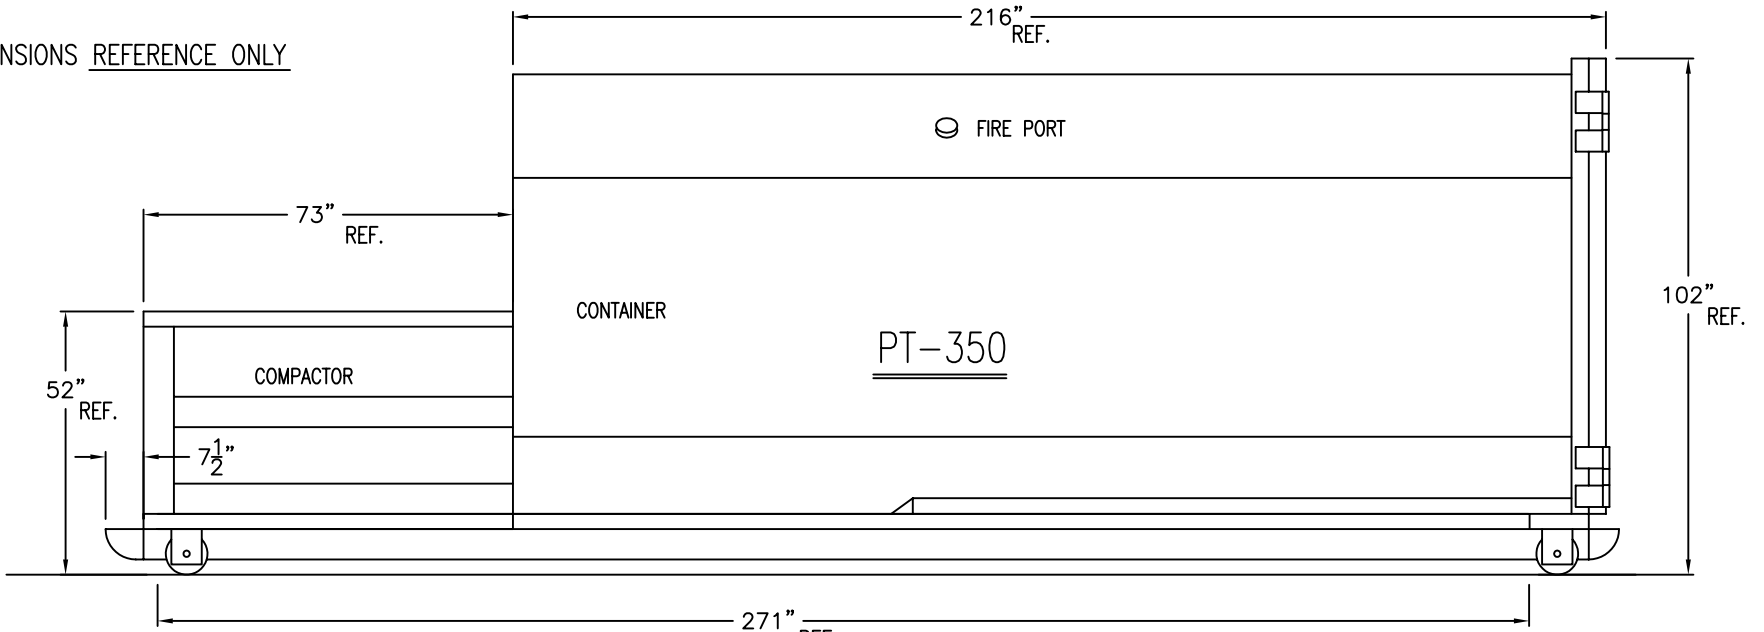

SIDE VIEW

PTR BALER & COMPACTOR

