



800-523-3654

BALER & COMPACTOR

www.ptrco.com

Stationary Compactors



TP-3000

Tram-Pak Stationary Compactor

Designed For

- * Retailers * Hospitals * Hotels * Distribution Centers *
- * Manufacturing Centers * Recycling Centers * Home Centers *

Our TP-3000 compactor is designed for long lasting performance and durability. All components are built using heavy-duty structural steel components and welded by AWS certified technicians. This unit has total U.L. approval, standard 3 button controls (On/Off key switch, mushroom stop, auto reverse) and a 13' Sealtite.

Specifications

Charge Box Capacity	3.2 Cu Yd
Clear Top Opening (L x W)	68" x 60"
Capacity Per Hour	158 cy/hr

Electrical Equipment

Electrical Motor 208 / 230 / 460	3 Phase
Electrical Control Voltage	120 VAC
HP	10

Performance Characteristics

Cycle Time	98 sec
Total Normal Force	62,000 lbs
Total Maximum Force	74,000 lbs
Normal Ram Face Pressure	35 psi
Maximum Ram Face Pressure	41 psi



Hydraulic Equipment

Hydraulic Pump Capacity	10.5 gpm
Normal Pressure	2200 psi
Maximum Pressure	2600 psi
Hydraulic Cylinder	6" Bore
Hydraulic Cylinder	4" Rod
Weight	6,850 lbs



PTR Baler & Compactor Company • 2207 E Ontario St. • Philadelphia, PA 19134
 215-533-5100 • (FAX) 215-533-8906 • 800-523-3654 • www.PTRCO.com

Printed in the U.S.A.
 © PTR Baler & Compactor

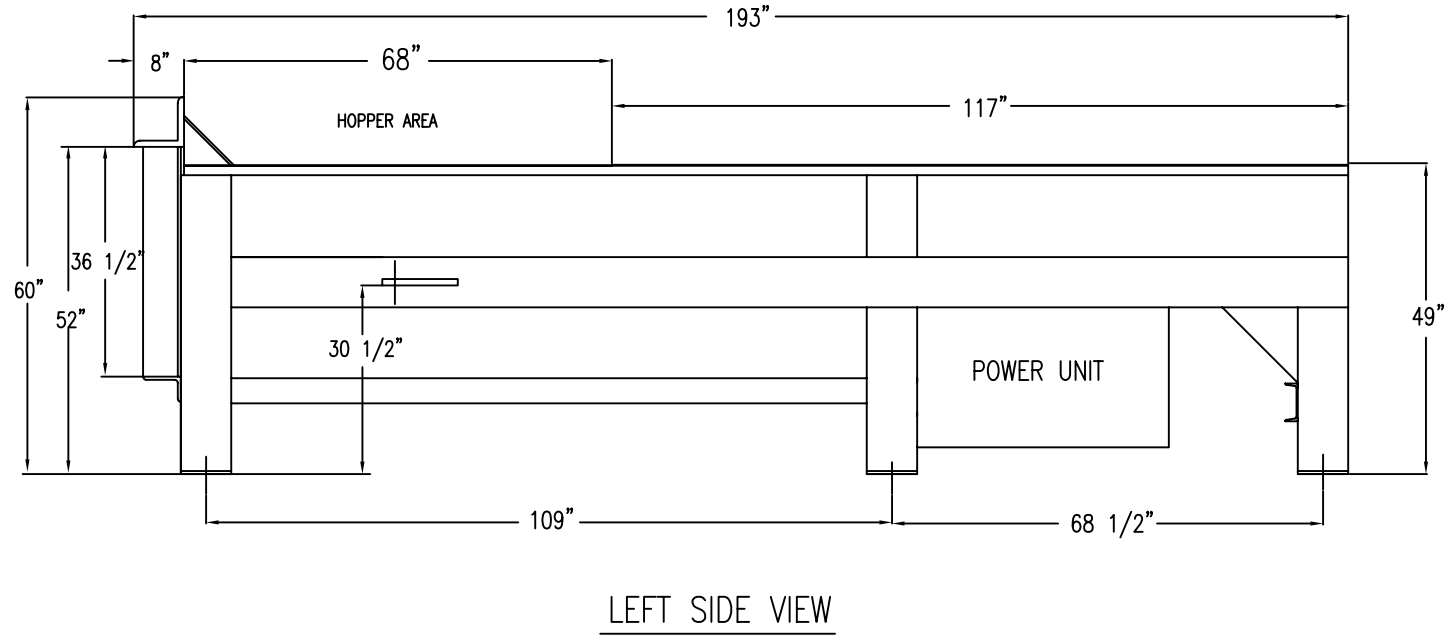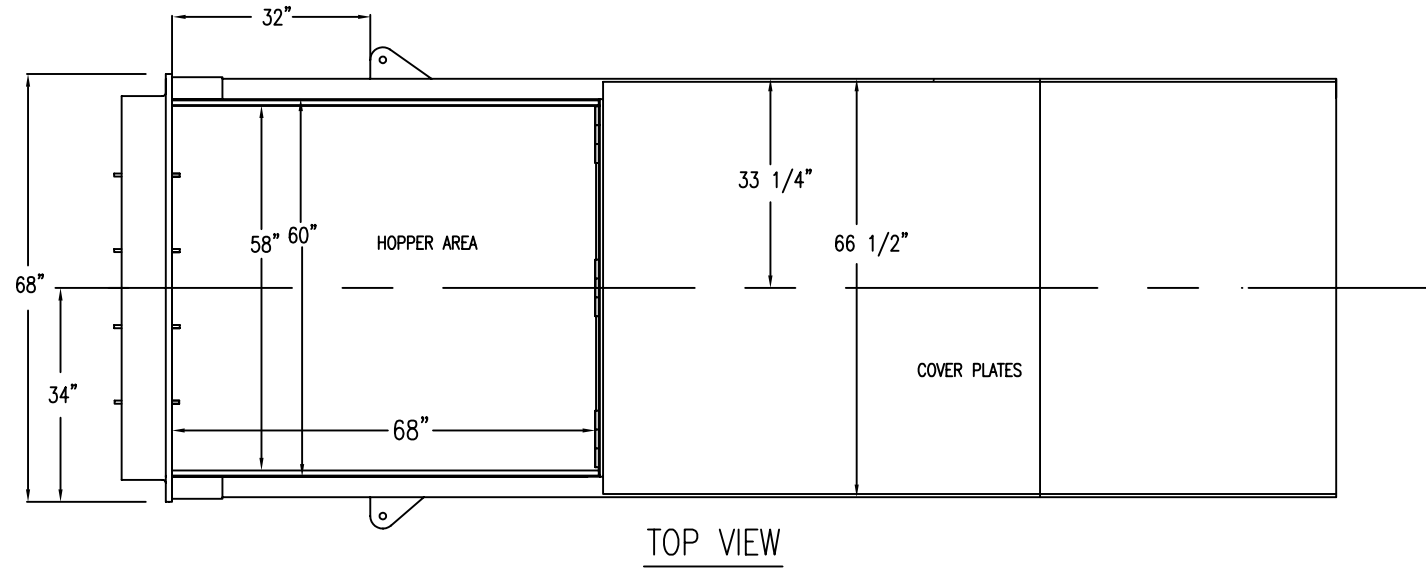

TITLE:

TP-3000HD COMPACTOR

DWG. NO: AC340152

1/5/94

PTR BALER & COMPACTOR

